



ULT-P2SQPOE36



ULT-P2SQPOEP43


ULT-P2SQPOE

2 Megapixel/1080p IP Miniature Square Camera

Features

- Sony Exmor 2.07MP Image Sensor
- Triple Codec (H.264/MPEG4/MJPEG)
- Triple Stream
- D-WDR
- Supports Onvif
- PoE
- Choice of Lens Type (Pinhole or Standard)

Image Sensor	Sony Exmor 2.07MP Image Sensor
Scan System	Progressive Scan
Total Pixels	2000(H)×1121(V) 2.24MegaPixles
Effective Pixels	1984(H)×1105(V) 2.19MegaPixles
Day & Night	Auto/Day(Color)/Night(BW)
Minimum Illumination	0.1 Lux
Privacy	Area On/O (6 Programmable Zone)
WDR	DWDR (1~5Step)
3D DNR	1~63
Motion Detector	48 Zone (On/O, 1~5Step)
Elec. Shutter	Auto(1/15~1/10000), Suppress Rolling, Manual
White Balance	Auto/Indoor/Outdoor/Fluorescent
Focal Length	4.3 mm Mega Lens
Power Supply	DC12(V) ±10% / POE(option) Current Max 750mA
Operating Temp.	-10°C ~ +75°C
Preservation Temp.	-20°C ~ +80°C
Humidity	0% ~ 90%
Weight	Approx. 70 g
OS	Embedded Linux
Interface	RJ45 100/100 Base-T PoE
Protocol	TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP, HTTP,DHCP,FTP,SMT-P,DNS,DDNS
Onvif	Ver2.4
Simultaneous Access	Max. 10 user
Compress Format	H.264/MPEG4/MJPEG
Resolution	1920×1080/1280×720/640×360/320×180
Frame rate	5fps ~ 30fps @ all resolution
Video Quality	H.264,MPEG4 : Bit rate Control MJPEG : Quality Level Control
Streaming	Triple Stream (Stream1,2,3) RTP/RTSP, UnicastRTP, Multicast RTP
Manager	IE, Firefox, Safari, Opera
Viewer	IE over 10ver (Active-X)

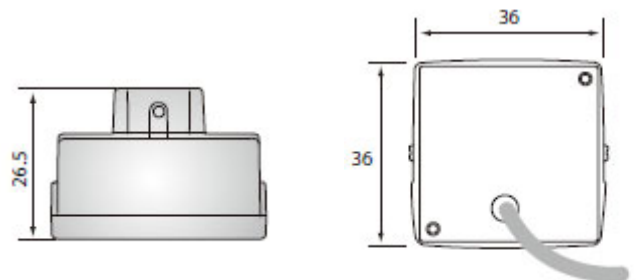

Ordering Information

- ULT-P2SQPOE36:** 2 Megapixel IP Miniature Square, 3.6mm Board Lens
ULT-P2SQPOEP43: 2 Megapixel IP Miniature Square, 4.3mm Pinhole Lens

2 MEGAPIXEL | 1080p