




11 SR/SG Series Cylinder

SR Series Slide cylinder



SRB 16x100

How to Order?

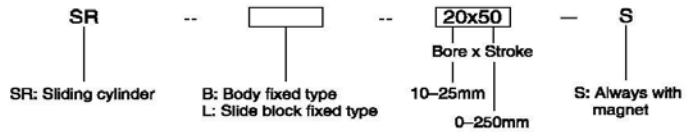

Order example:


- * SR type sliding cylinder, body fixed type, 20mm bore, 50mm stroke, Model: SRB 20X50-S
- * SR type sliding cylinder, slide block fixed type, 16mm bore, 75mm stroke, Model: SRL 16X75-S

Specifications

Bore(mm)	10	16	20	25
Acting type	Double piston Double acting			
Working medium	Clean air (25 μ filtration)			
Working temperature (°C)	-5~70			
Working pressure (Bar)	1-9			
Guaranteed pressure (Bar)	13.5			
Speed range (mm/s)	50-200			
Cushion type	No	Shock Absorber		
Oil supply	Not Required			
No rotating accurag	± 0.1°			± 0.5°
Port Size	M5x0.8		G 1/8	

SG Series Three-shaft cylinder

How to Order?

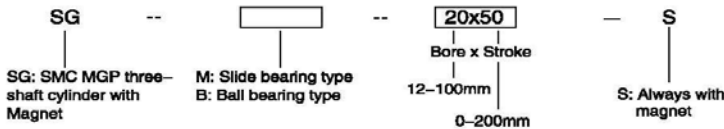

Order example:

- * SG type three-shaft cylinder, slide bearing type, 20mm bore, 60mm stroke, Model: SGM 20X60-S
- * SG type three-shaft cylinder, ball bearing type, 32mm bore, 75mm stroke, with magnet, Model: SGB 32X75-S



SGM16x30-S

Specifications

Bore(mm)	12	16	20	25	32	40	50	63	80	100	Bore(mm)	12	16	20	25	32	40	50	63	80	100		
Guaranteed pressure (Bar)	15.3										Tolerance of stroke	+1.5 0											
Working pressure (Bar)	1.2~10.2										Bearing	Slide bearing / Ball bushing bearing											
Working temperature (°C)	-10~60										Non-rotating accuracy	Slide bearing	± 0.08°	± 0.07°	± 0.06°	± 0.05°	± 0.04°	Ball bushing bearing	± 0.10°	± 0.09°	± 0.08°	± 0.06°	± 0.05°
Piston speed (mm/s)	50-500					50-400					Port Size	M5x0.8			G 1/8			G 1/4			G 3/8		
Cushion	Rubber cushion																						