


HONEYWELL
PART NUMBER

311SX3-T

PRODUCT CODE

VDS0030

REV	DOCUMENT	CHANGED BY	CHECK
13	0038558	SS 08MAY08	BLR

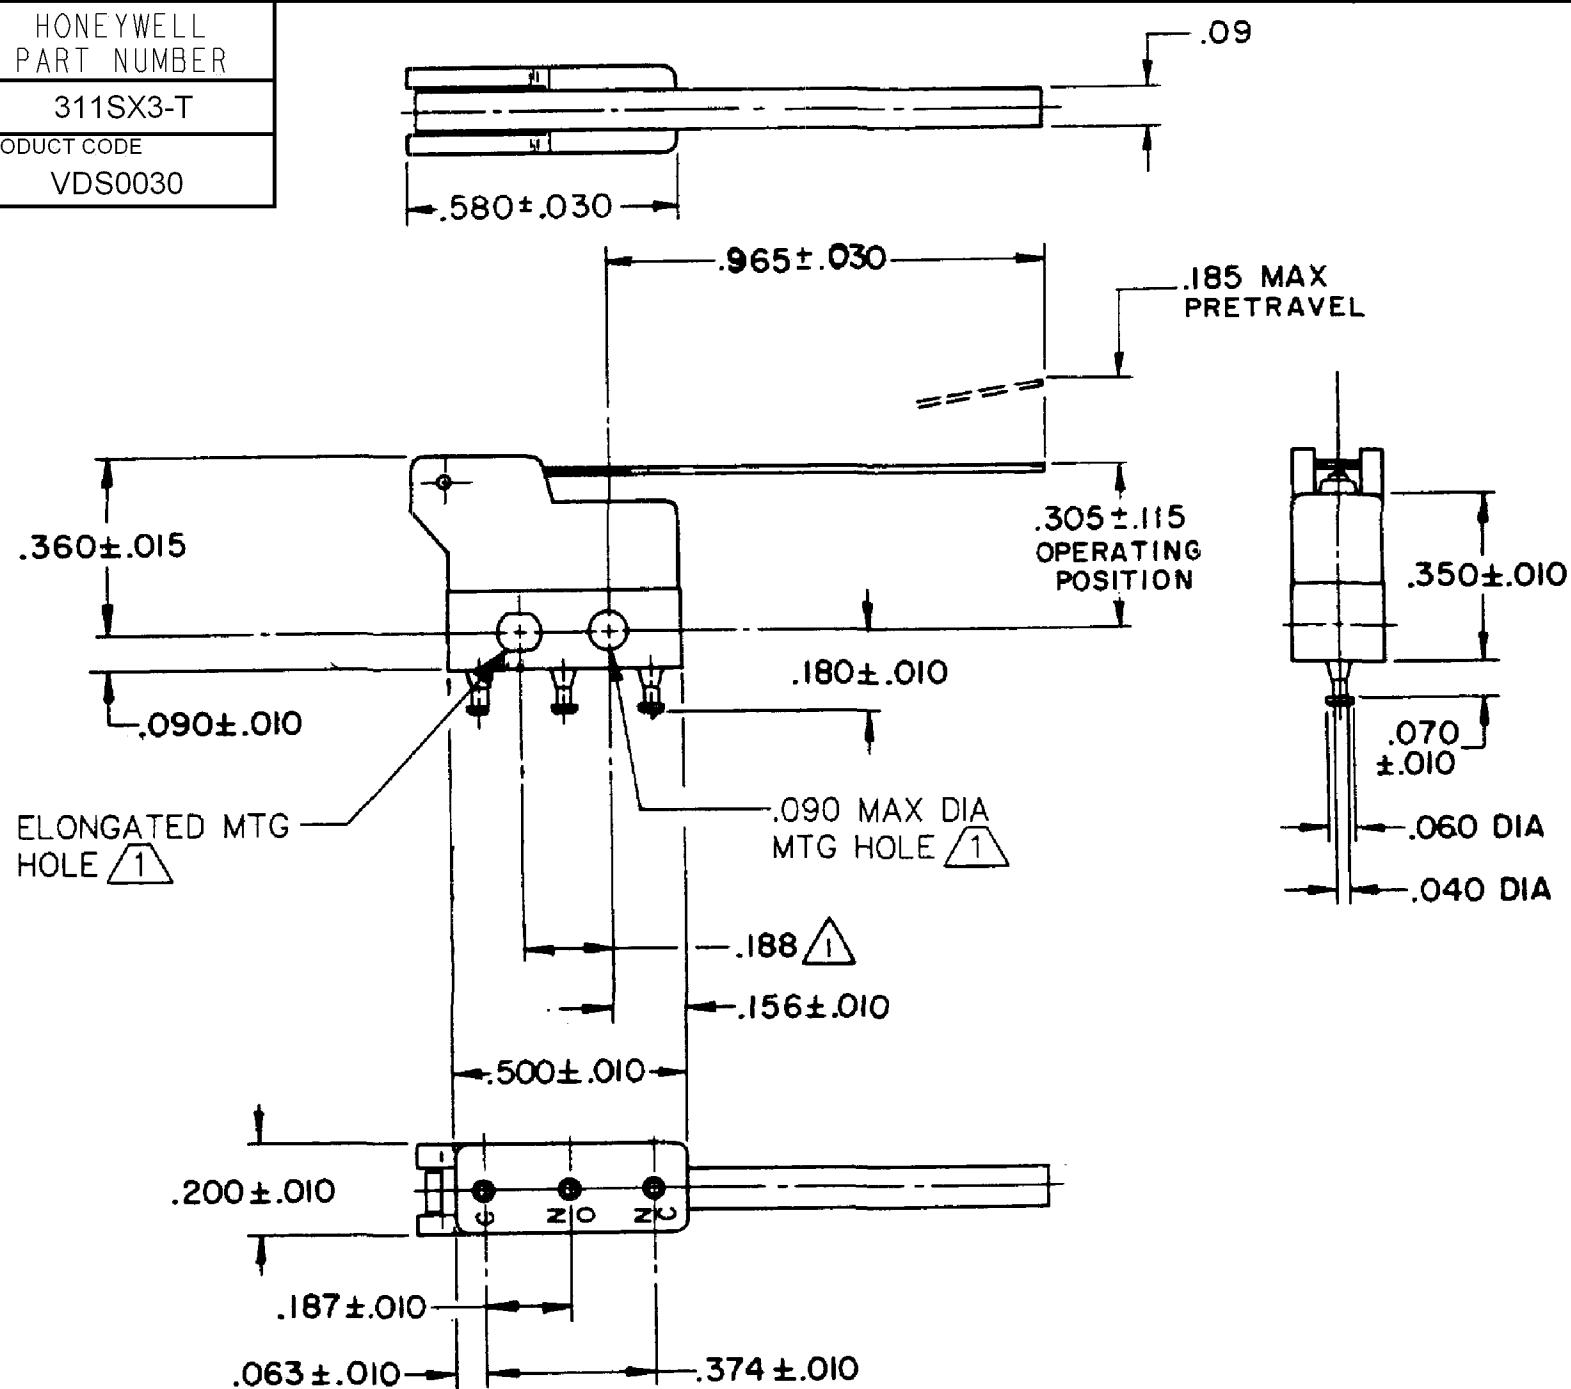

NOTE-

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. PR-861

REPLACES X41464-SX

CHARACTERISTICS

OPERATING FORCE - - - 20 GRAM MAX

RELEASE FORCE - - - - 3 GRAM MIN

DIFFERENTIAL TRAVEL - - .060 MAX

OVERTRAVEL - - - - - .024 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

28 VOLTS DC RATING 115 VOLTS AC, 60 CPS

SEA LEVEL 50,000 FT SEA LEVEL

INDUCTIVE 3 AMP 2 AMP 5 AMP

RESISTIVE 5 AMP 4 AMP 5 AMP

-

KEMA, CE 5A 250 V ~ T125 5E4

UL, CSA 5A 250 VAC

-

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE X ±

ONE PLACE .X ±

TWO PLACE .XX ±

THREE PLACE .XXX ±

FOUR PLACE .XXXX ±

ANGLES ±

THIRD ANGLE PROJECTION



DRAWN

SPK

26FEB08

CHECK

RJ

26FEB08

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

311SX3-T

REV

13

SCALE

-

WEIGHT: .003 LB MAX

SHEET 1 OF 1