



NOTES


- 1 - HEADS MAY BE INDEXED IN 90° INCREMENTS.
- 2 - LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
- 3 - FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
- 4 - THE LEFT INDICATOR IS GREEN AND INDICATES "POWER ON" IT IS ON GLH SERIES PRODUCTS ONLY. THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLF AND GLH SERIES PRODUCTS ONLY.
- 5 - THE MAXIMUM VOLTAGE, V_e OF GLF AND GLH SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
- 6 - FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
- 7 - CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38,1 / 1.50
- 8 - THE MAXIMUM VOLTAGE, V_e OF "06" AND "36" BASIC SWITCH CODE IS 300V (A300)
- 9 - TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT w/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS w/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

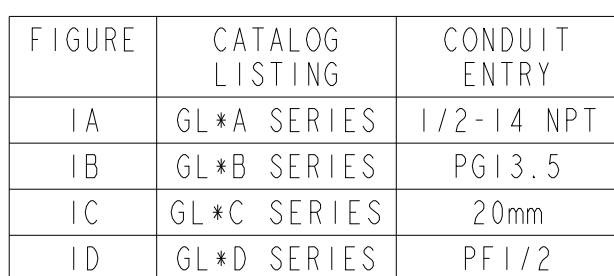

LEVER	ROLLER MATERIAL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19, 1 .75	65, 9 2.59	6, 4 .25
GLZ52B	STEEL	19, 1 .75	65, 9 2.59	6, 4 .25
GLZ52D	NYLON	38, 1 1.5	65, 9 2.59	6, 4 .25
GLZ52E	NYLON	19, 1 .75	79, 37 3.125	33, 07 1.300
GLZ52W	RUBBER	40, 0 1.6	71, 5 2.81	12, 7 .5
GLZ52Y	RUBBER	50, 0 1.97	68, 8 2.71	10, 0 -.39

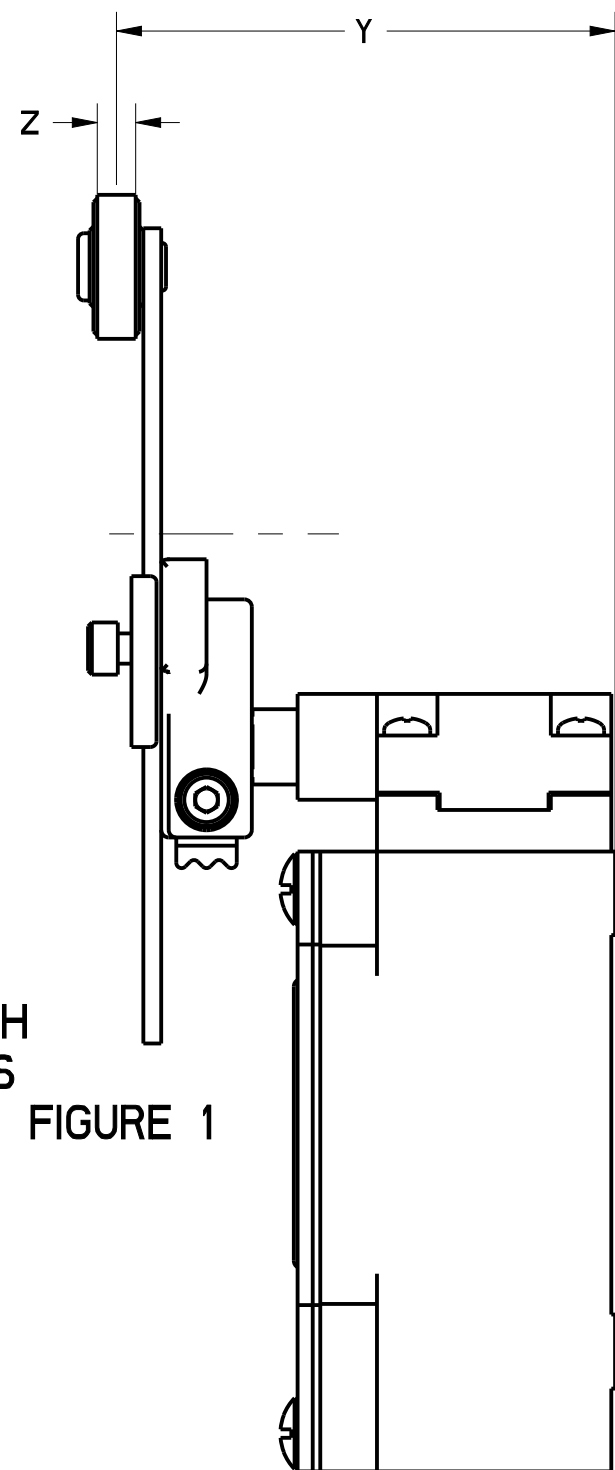


ENVIRONMENTAL RATING
IP67
NEMA/UL TYPES 1, 4, 12, 13

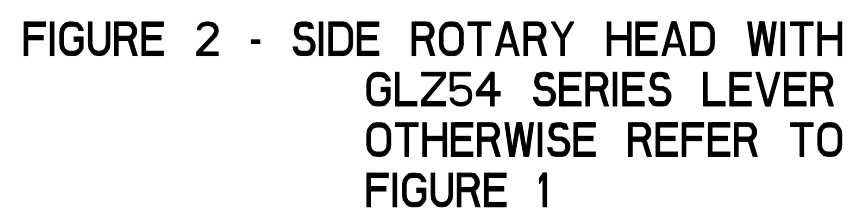

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLA****	I	N/A	N/A
GLF****	I	N/A	N/A
GLH****	I	N/A	N/A
GL*A***	IA	N/A	N/A
GL*B***	IB	N/A	N/A
GL*C***	IC	N/A	N/A
GL*D***	ID	N/A	N/A
GL****A1*	I	1	8
GL****A2*	I	3	9
GL****A4*	I	2	10
GL****A5*	I		8
GL****B	I	4	11
GL****C	I	5	13A, 13B
GL****D	I	6	14A, 14B
GL****E7A	I	7A	12
GL****E7B	I	7	12
GL****E7C	I	7E	15
GL****E7D	I	7B	12
GL****K8A	I	7C	15
GL****K8B	I	7D	15
GL****K8C	I	7	15

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED	
		GL SERIES CHAR	

THIRD ANGLE PROJECTION			
			

SCALE	1 : 1		
DO NOT SCALE PRINT			
TOLERANCES APPLY TO DESIGN UNITS; CONVERSIONS ARE ONLY FOR REFERENCE UNLESS NOTED; TOLERANCES ARE :			
DIM mm	TOL mm / $\frac{1}{16}$ IN	DIM IN	TOL mm / $\frac{1}{16}$ IN
NO PLACES	0.1	0.1	0.1
ONE PLACE	0.5	0.5	0.5
TWO PLACES	0.01	0.01	0.01
THREE PLACES	0.005	0.005	0.005
ANGLES	$\pm 2^\circ$	30 MIN	30 MIN
SI METRIC		US CUSTOMARY	
DESIGN UNITS			
WEIGHT			

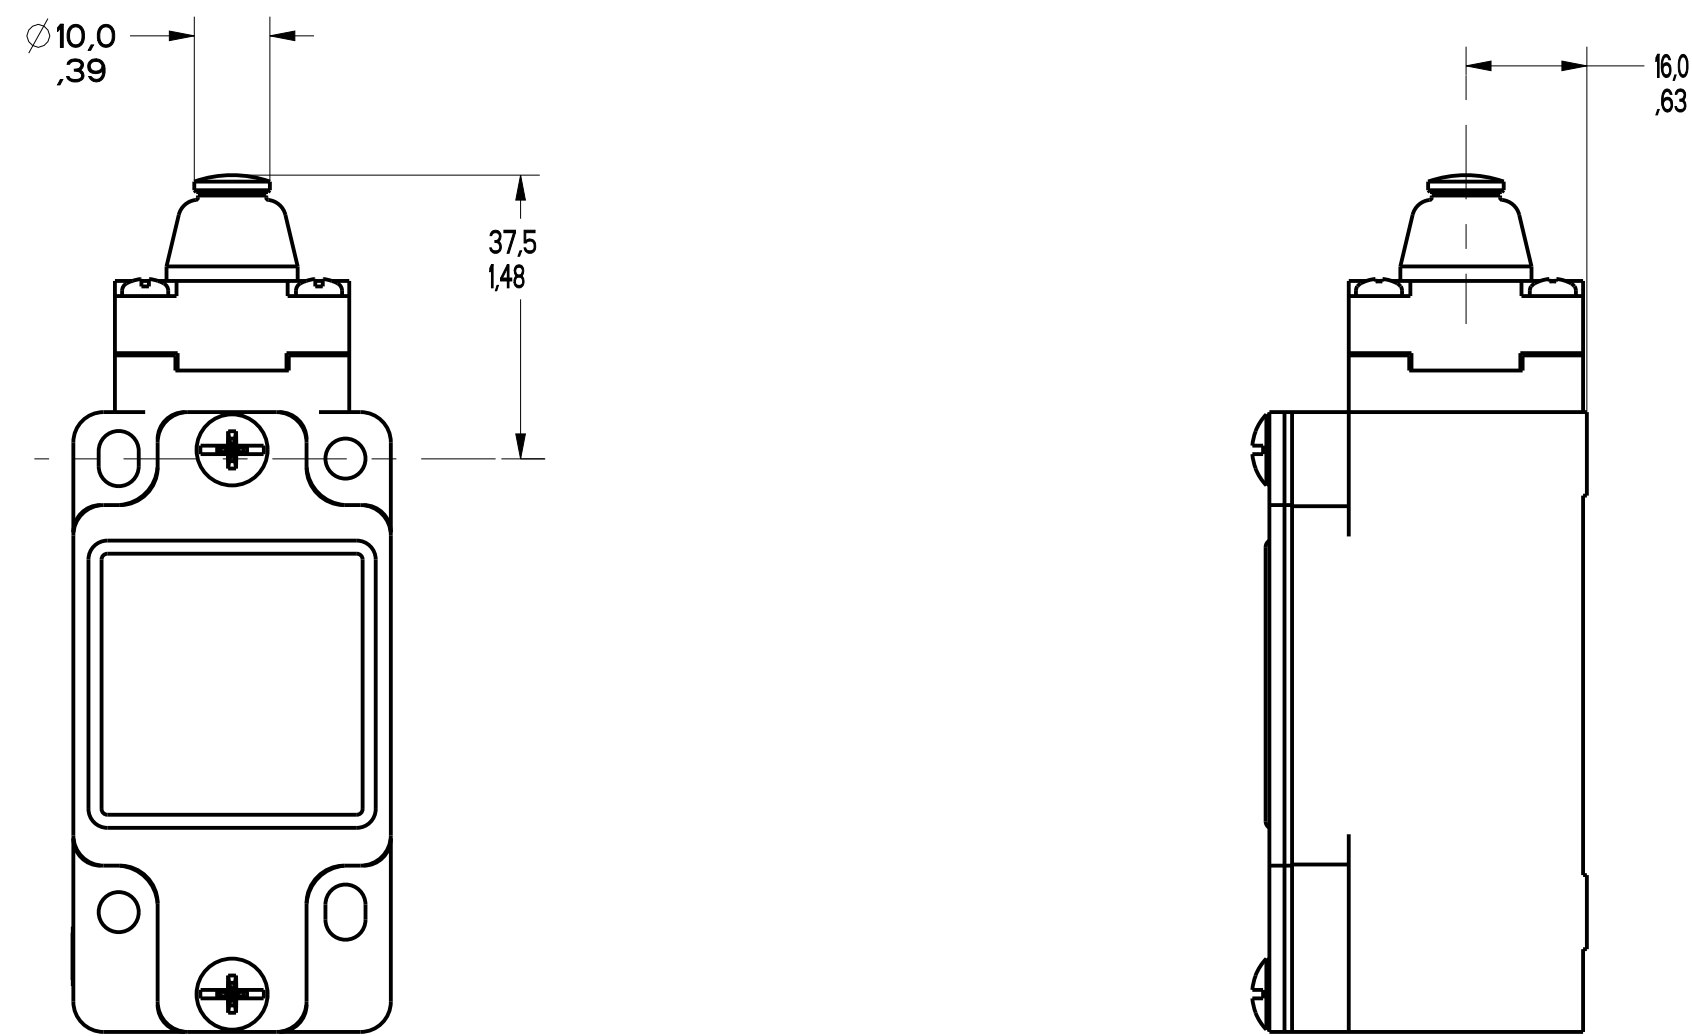


FIGURE 4 - TOP PIN PLUNGER HEAD
OTHERWISE REFER TO
FIGURE 1

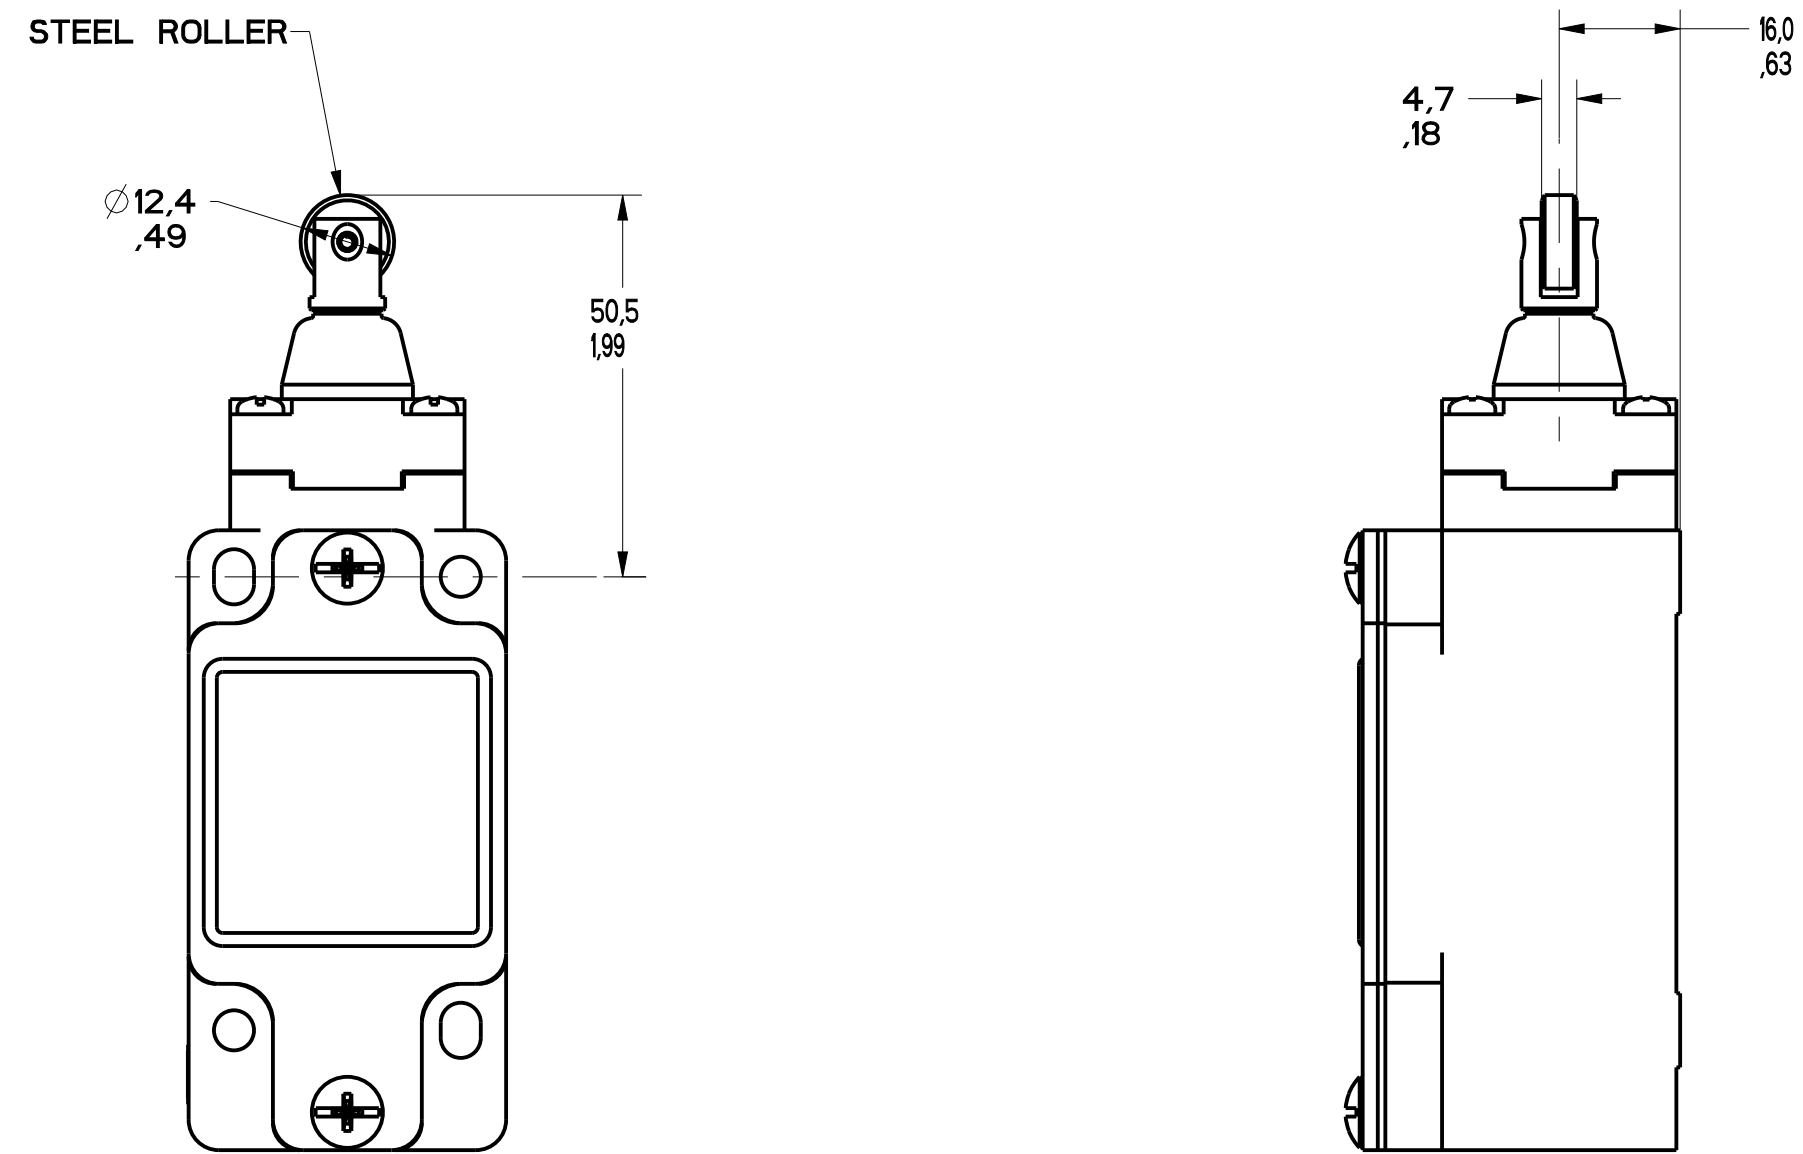


FIGURE 5 - TOP ROLLER PLUNGER HEAD
OTHERWISE REFER TO
FIGURE 1

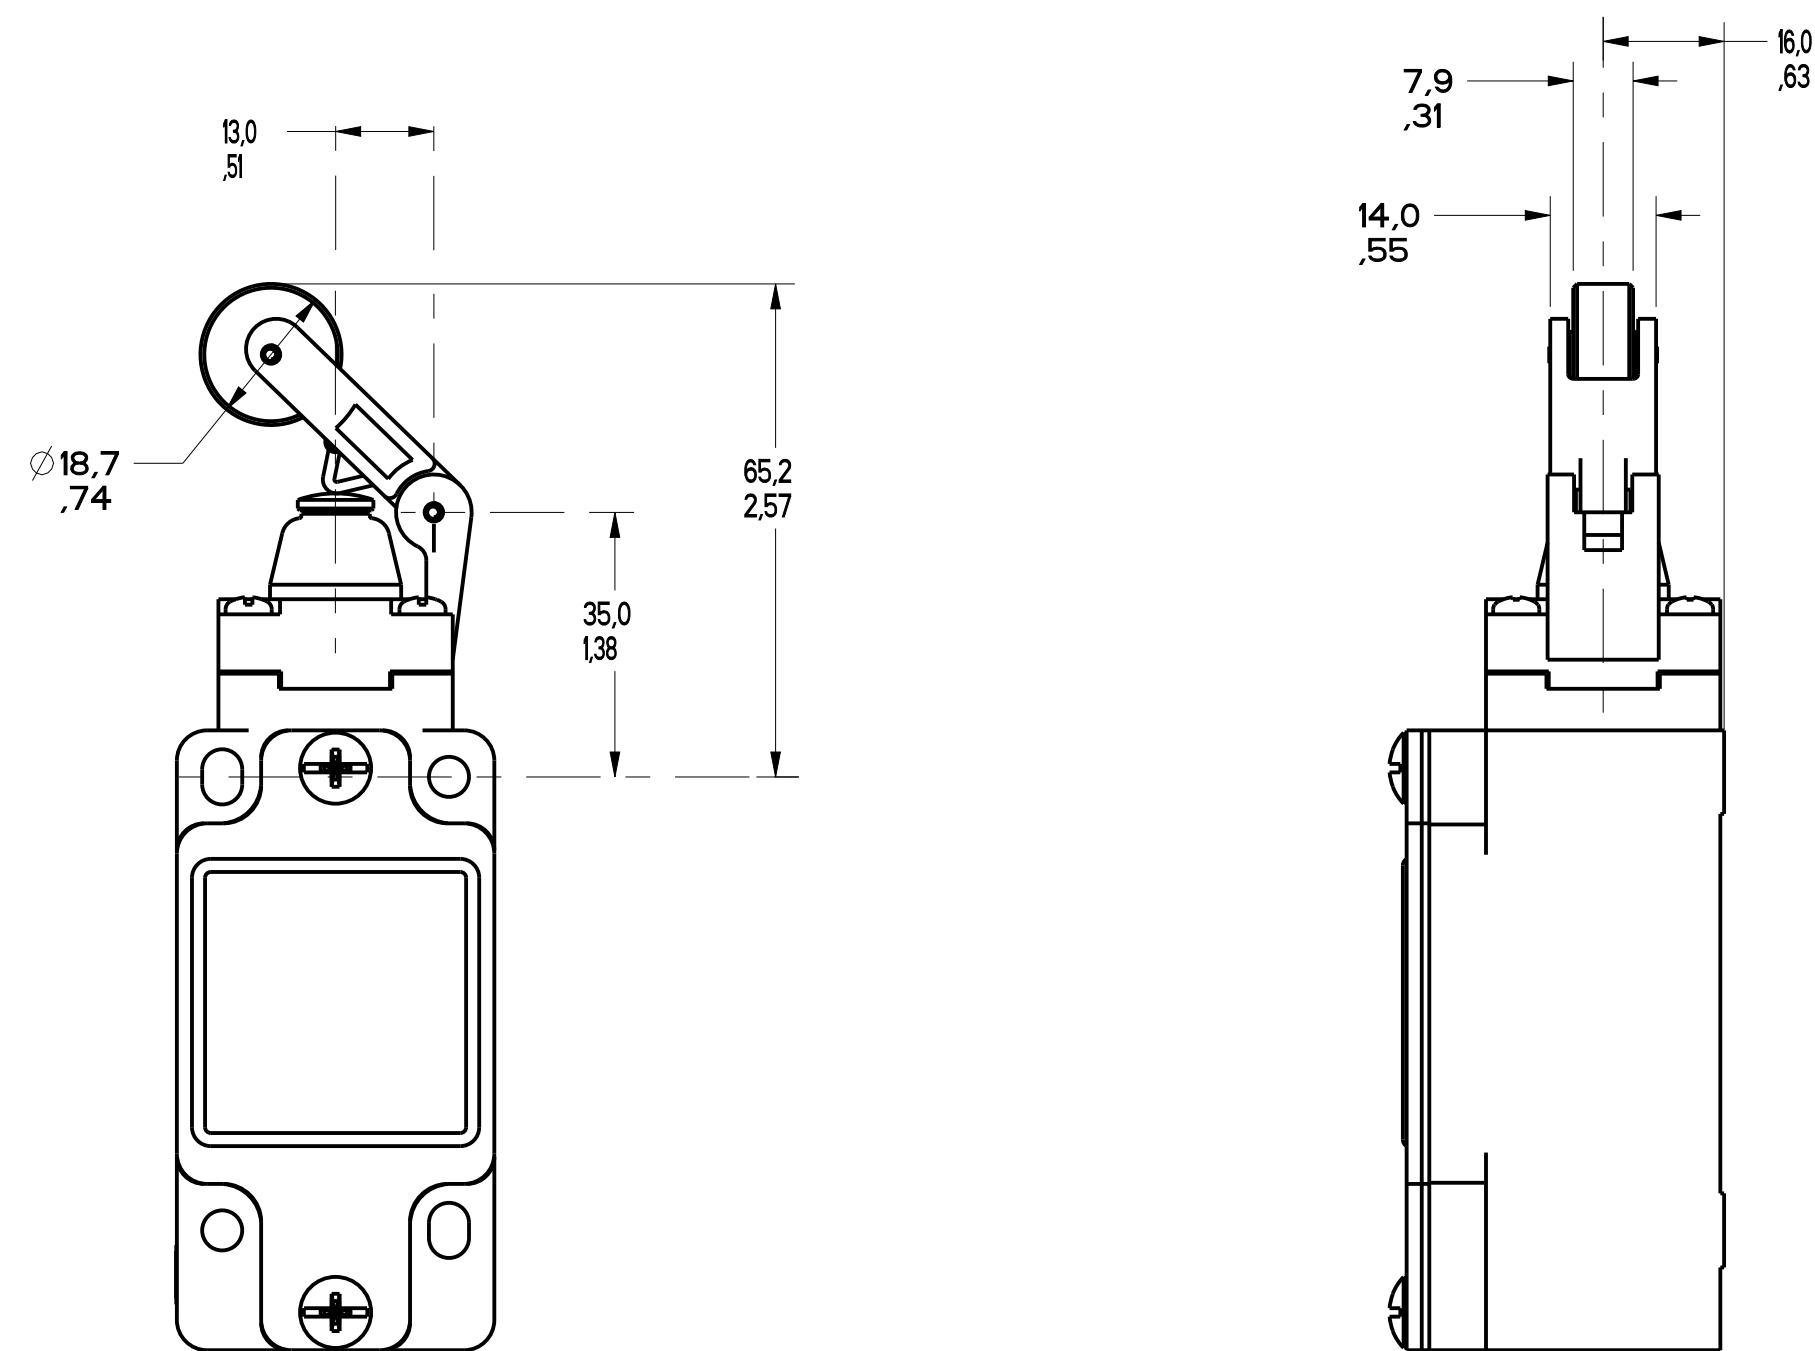


FIGURE 6 - TOP LEVER HEAD,
OTHERWISE REFER TO
FIGURE 1

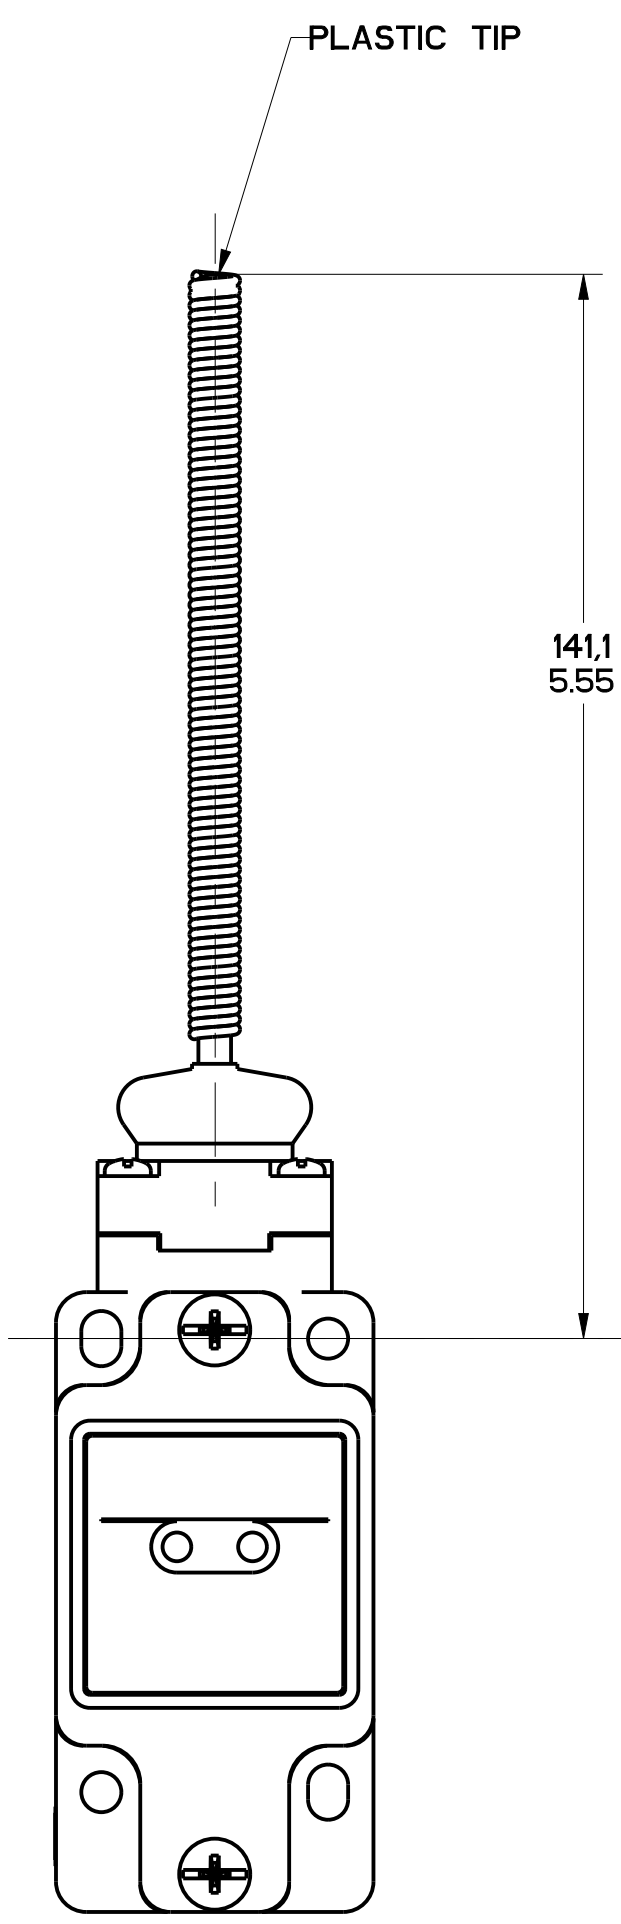


FIGURE 7 - WOBBLE HEAD, AND CAT WISKER HEAD COIL ACTUATOR, OTHERWISE REFER TO FIGURE 1

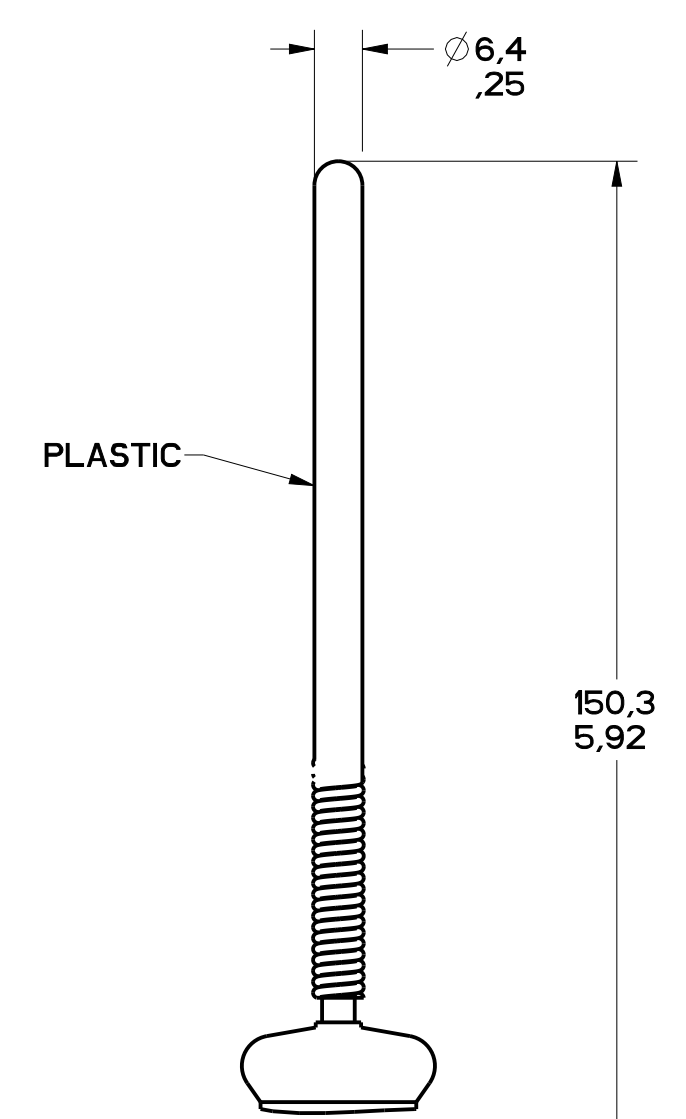


FIGURE 7A - WOBBLE HEAD, PLASTIC ACTUATOR, OTHERWISE SAME AS FIGURE 7

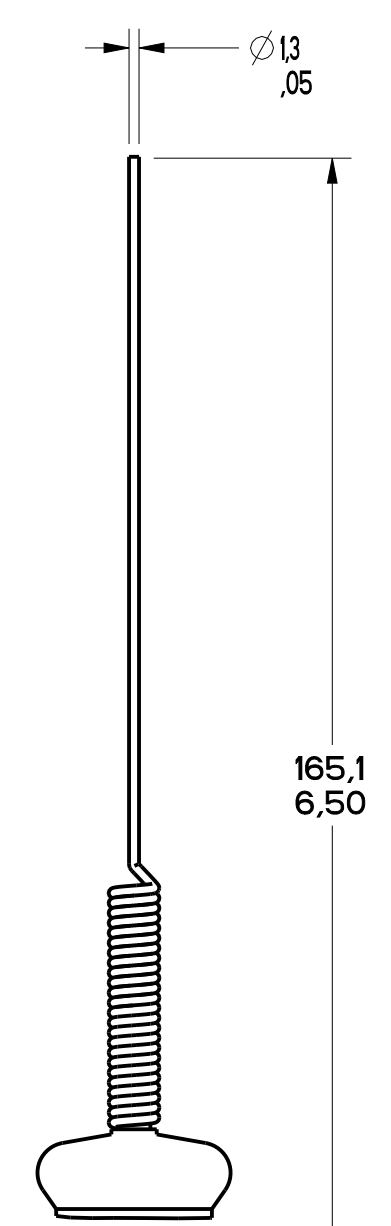


FIGURE 7B - WOBBLE HEAD, STAINLESS STEEL SPRING ACTUATOR, OTHERWISE SAME AS FIGURE 7

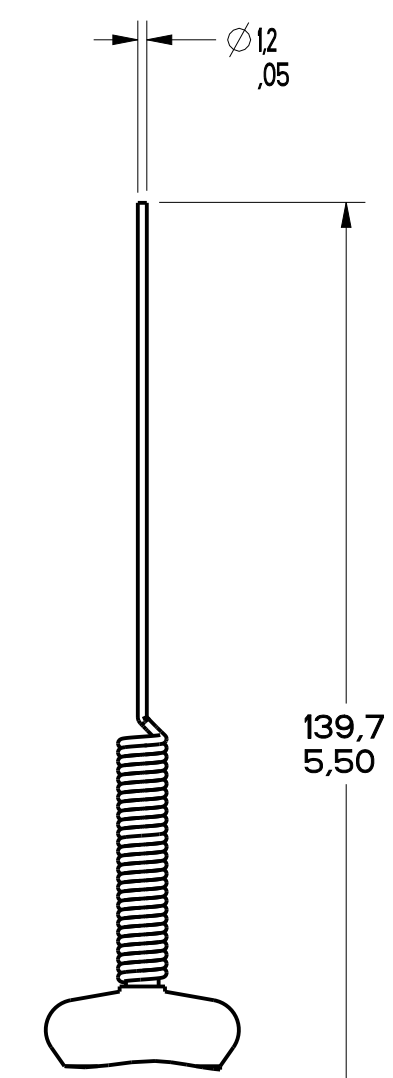


FIGURE 7C - CAT WHISKER ACTUATOR, STAINLESS STEEL SPRING, OTHERWISE SAME AS FIGURE 7

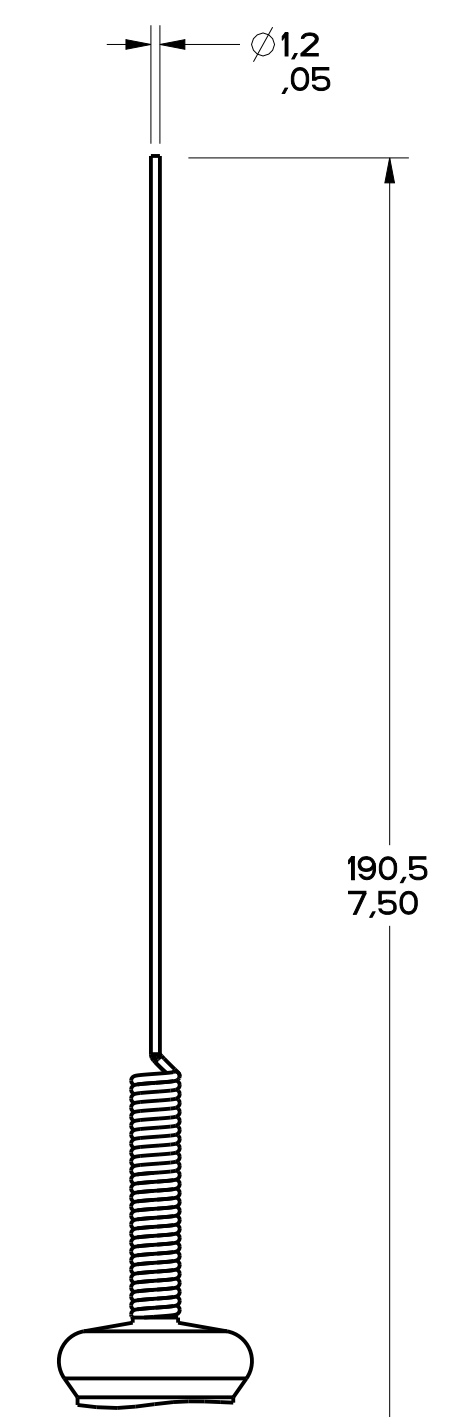


FIGURE 7D - CAT WHISKER ACTUATOR, STAINLESS STEEL SPRING, OTHERWISE SAME AS FIGURE 7

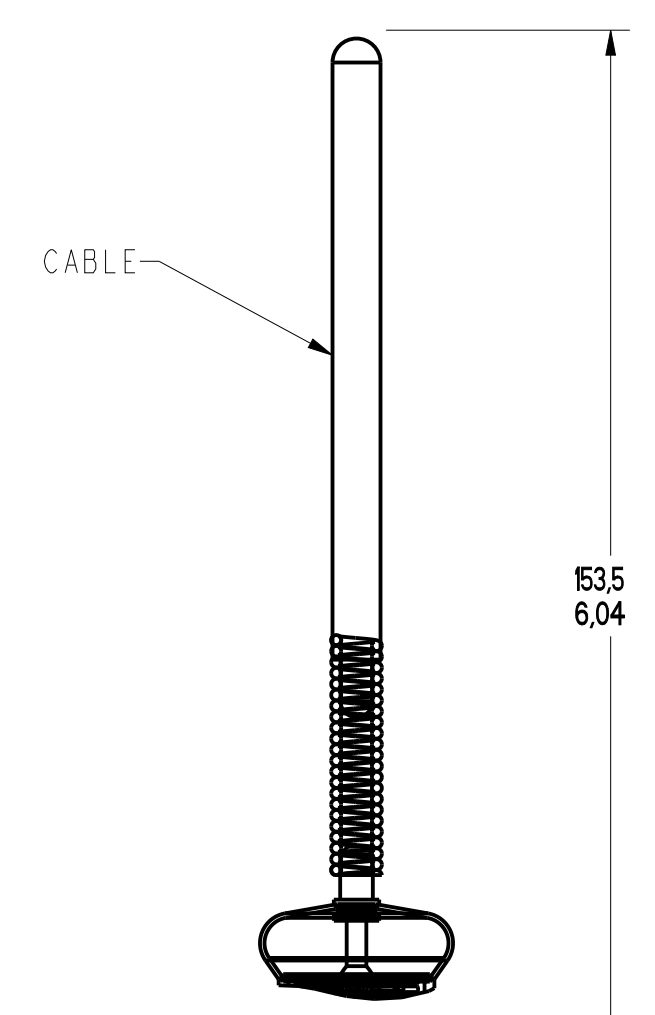


FIGURE 7E - CABLE WOBBLE ACTUATOR, OTHERWISE SAME AS FIGURE 7

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		FED. MFG. CODE 91929		CATALOG LISTING	
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED		GL SERIES CHART 1	
DESIGN UNITS WEIGHT		SI METRIC X		US CUSTOMARY X	

TOLERANCES					
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 1					
	IN	MIL	IN	MIL	IN
NO PLACES			1/16	0.0625	0.001
ONE PLACE	0.1	0.001	0.01	0.0001	0.00001
TWO PLACES	0.01	0.0001	0.001	0.00001	0.000001
THREE PLACES	0.001	0.00001	0.0001	0.000001	0.0000001
ANGLES	±2°				

DRAWING NUMBER		PAGE 3 OF 13		RELEASE NO. PR-21557		REPLACES	
16		1200112		CMH		1200112	
REVISIONS		CHECK		CMH		1200112	
A		00050401		01		JUN03	
B		0002886		20 JAN04			
C		0023759		07 AUG06			
D		0037216		08 FEB08			
E		0043629		05 OCT10			
F		0048605		07 FEB09			
G		0070059		08 OCT10			
H		0094510		1200112			
I		0094510		1200112			
J		0094510		1200112			
K		0094510		1200112			
L		0094510		1200112			
M		0094510		1200112			
N		0094510		1200112			
O		0094510		1200112			
P		0094510		1200112			
Q		0094510		1200112			
R		0094510		1200112			
S		0094510		1200112			
T		0094510		1200112			
U		0094510		1200112			
V		0094510		1200112			
W		0094510		1200112			
X		0094510		1200112			
Y		0094510		1200112			
Z		0094510		1200112			

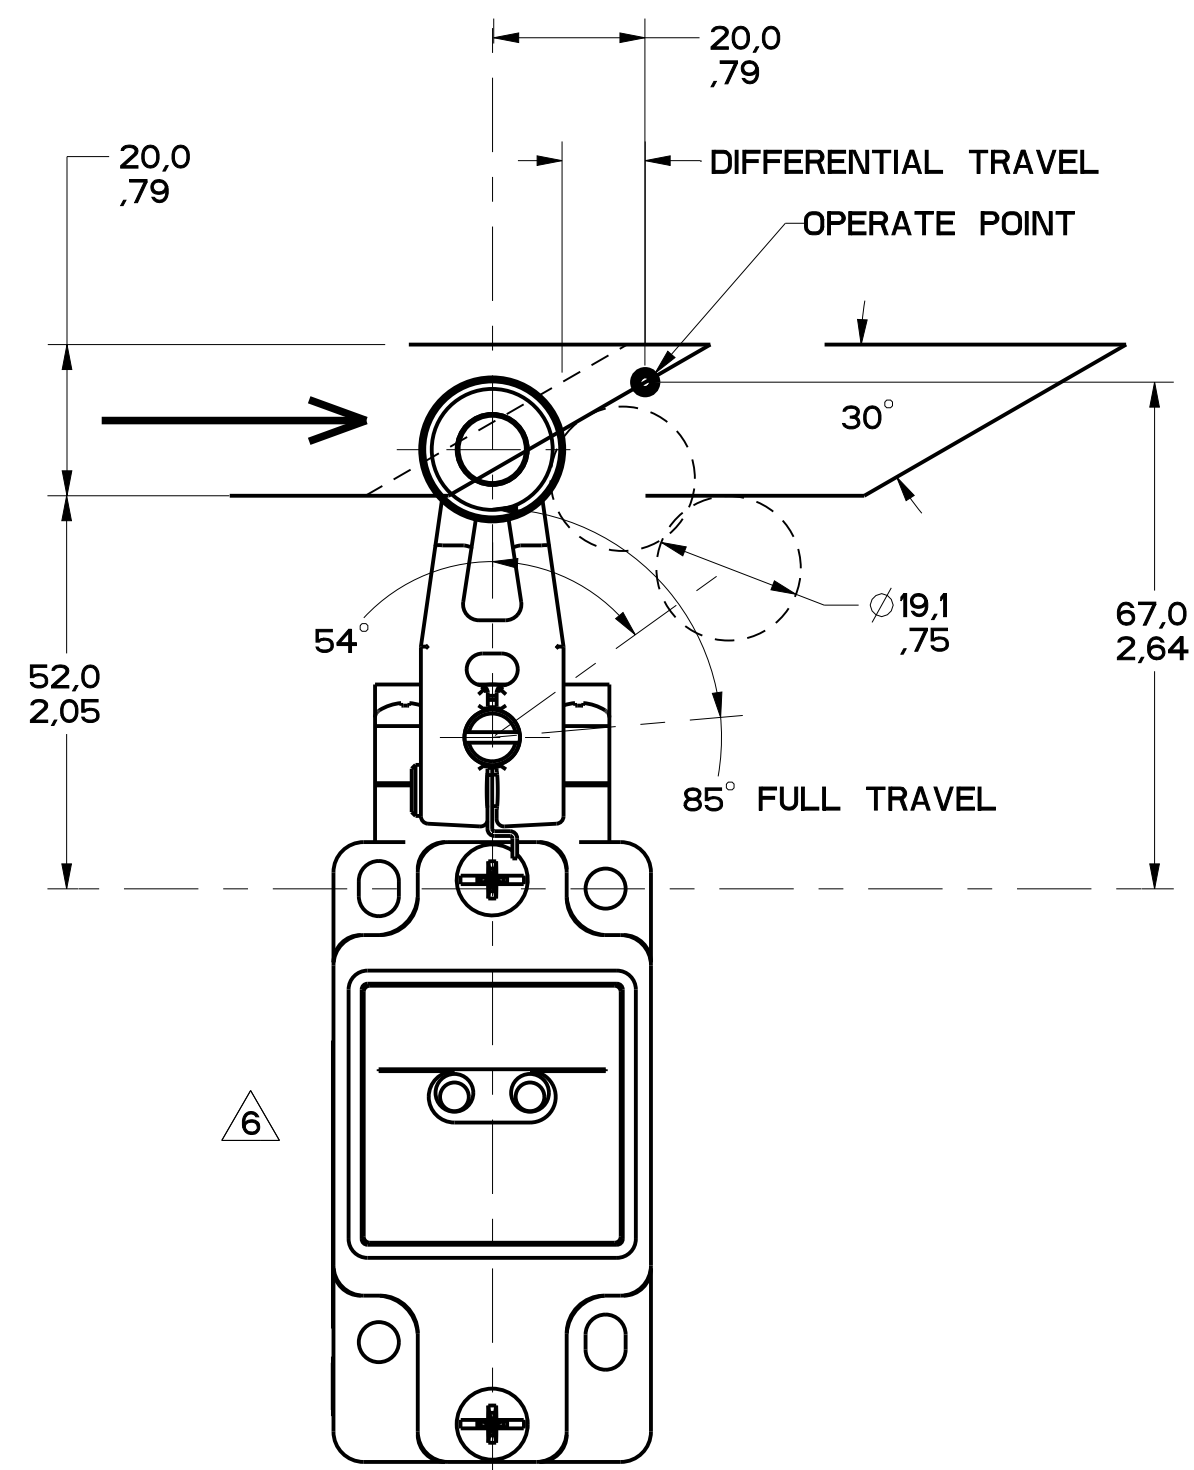


FIGURE 8

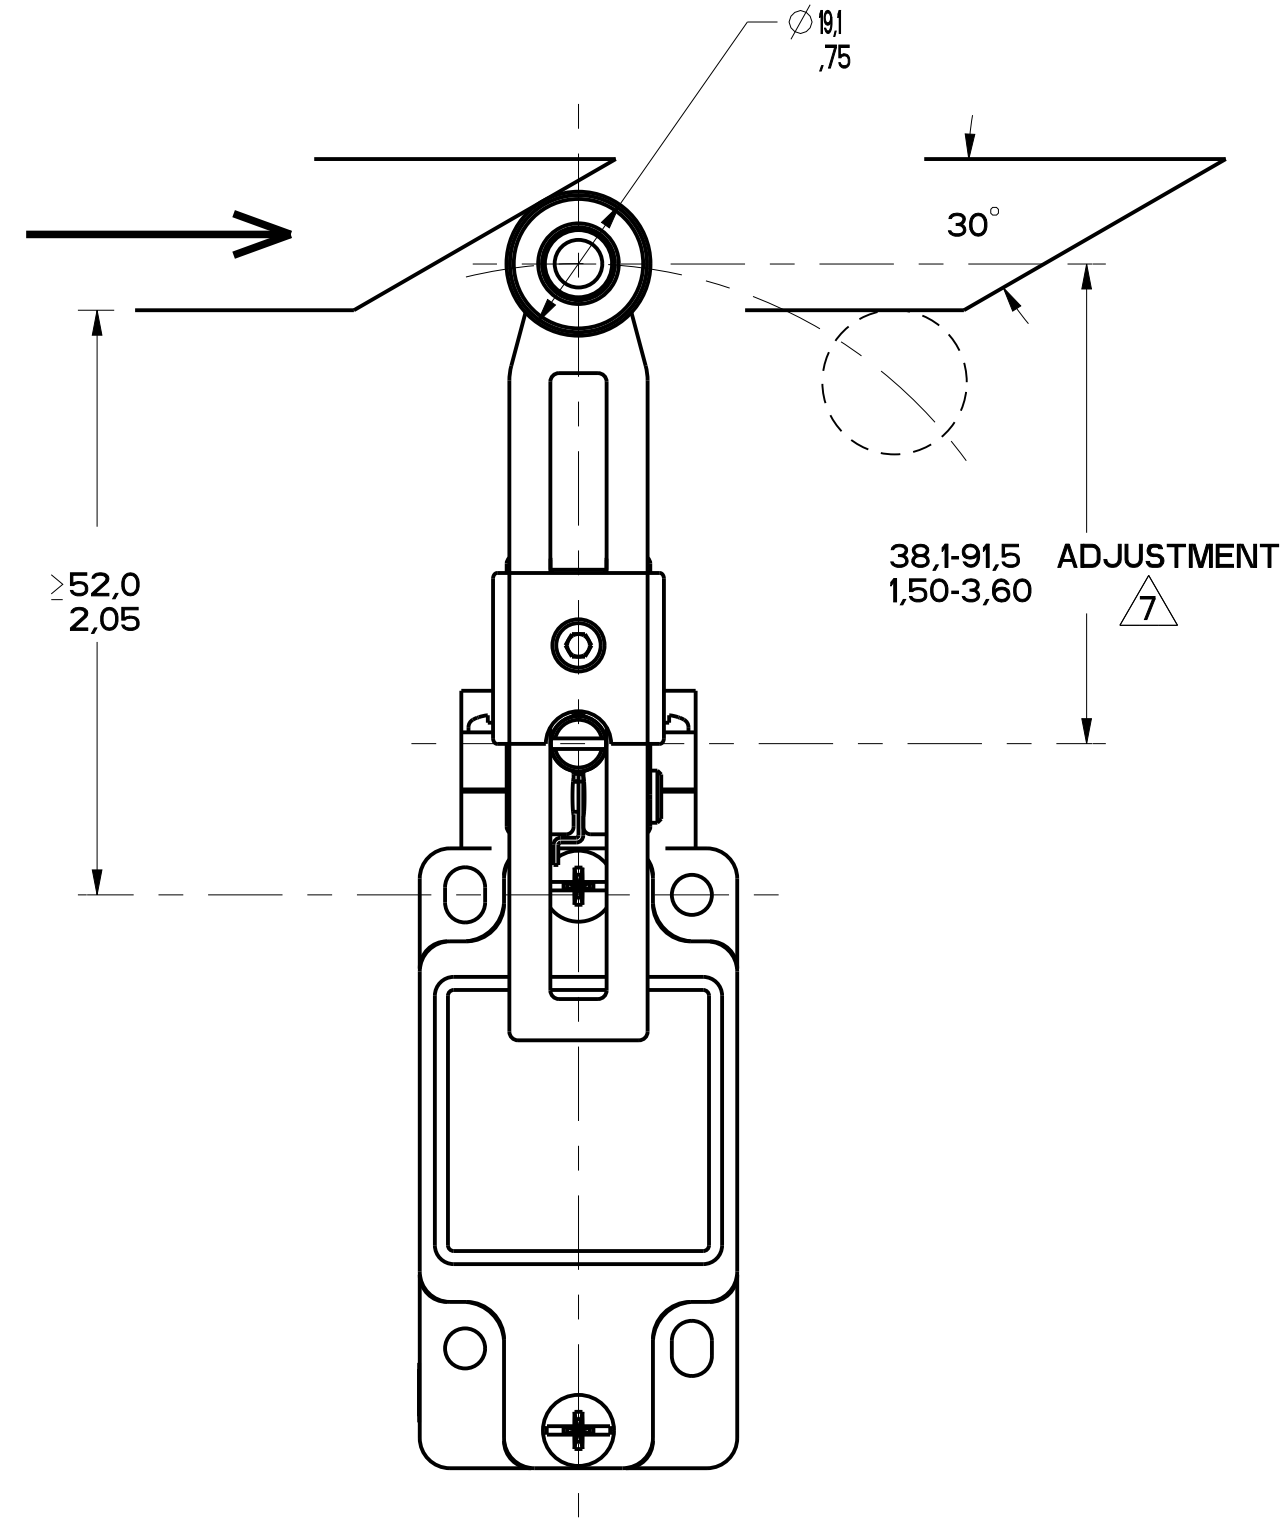


FIGURE 9

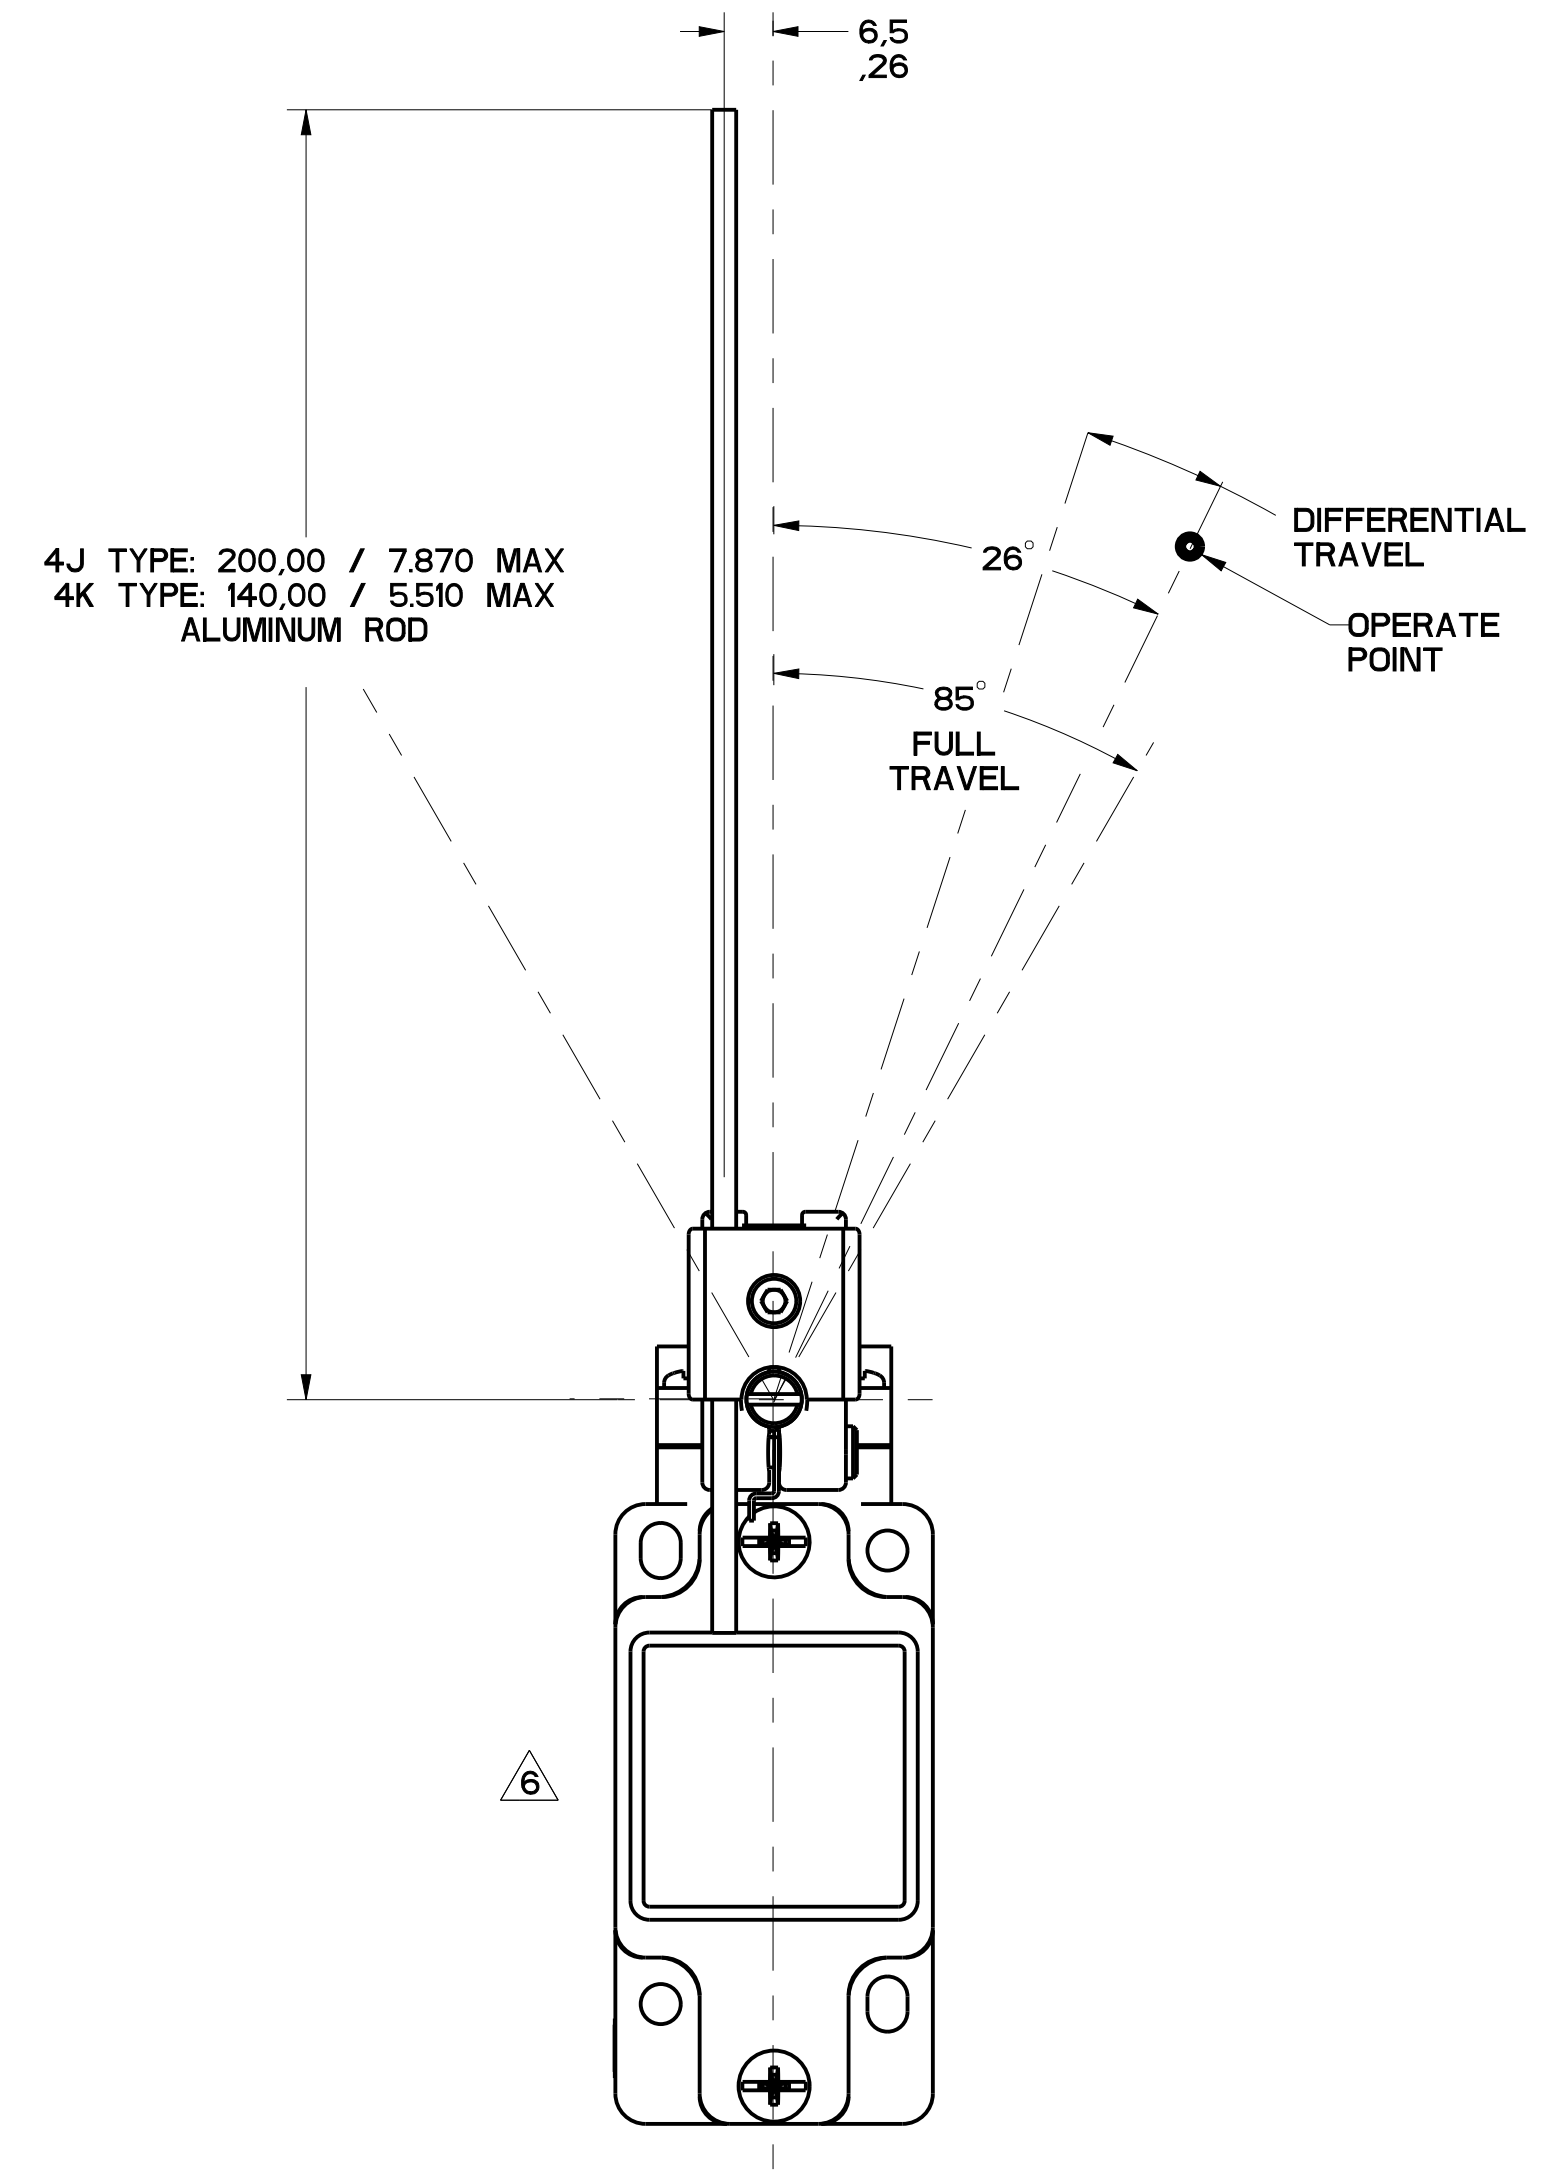


FIGURE 10

[illegible]

PTC/CAD	DRAWN	S A V 27MAR96	CHECK	DVM	07AUG06	CHECK	CMH	05OCT10	REVISIONS
									F 0000401
									GLH 2 JUN03
									G 0002986
									RS 20 JAN04
									H 0023759
									RFP 07AUG06
									J 0037216
									BS 09FEB08
									K 0034629
									SS 12SEP08
									L 0048605
									YKS 09FEB09
									M 0070059
									DN 05OCT10
									N 0049570
									SSH 12OCT12

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929
MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

GL SERIES CHART 1

THIRD ANGLE PROJECTION			
			
SCALE	1 : 1		
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE: $\pm$			
NO PLACES	DIM X	TOL mm	DIM X
ONE PLACE	X .1	0.1 / 0.016	1.6
TWO PLACES	X .01	0.01 / 0.001	0.016
THREE PLACES	X .001	0.001 / 0.0001	0.0016
ANGLES	$\pm 20''$		
SI METRIC		US CUSTOMARY	
DESIGN UNITS			
WEIGHT			

REVISIONS	
1	0000491
2	01 JUN 93
3	0002986
4	20 JAN 94
5	0023759
6	07 JUN 95
7	0037216
8	08 FEB 98
9	0043629
10	10 OCT 98
11	0048605
12	09 FEB 99
13	0072899
14	0075058
15	00 OCT 10
16	0994578
17	0012061

FIGURES 8, 9, 10 SIDE ROTARY HEAD, ANGULAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAX. OPERATE DEGREE/S	MIN. OPERATE DEGREE/S	MAX. OPERATE FREQUENCY OPS/MIN
GL**01A GL**07A	SNAP - ACTION CONTACTS SINGLE POLE 	 12° DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**03A GL**33A	SLOW ACTING BREAK BEFORE MAKE 	 38°	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**04A GL**34A	SLOW ACTING MAKE BEFORE BREAK 	 26°	$\frac{.330}{2.9}$	$\frac{.400}{3.5}$	1290	13	250
GL**05A GL**35A	SLOW ACTING 	 23-24	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**06A GL**36A	SLOW ACTING 	 21-22	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**20A GL**22A GL**24A GL**32A	SNAP ACTION CONTACTS DOUBLE POLE 	 12° DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	$\frac{.385}{3.4}$	1290	13	250
GL**21A GL**25A GL**28A GL**31A	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 	 8 DIFFERENTIAL TRAVEL	$\frac{.330}{2.9}$	N/A	1290	13	250

SIDE ROTARY HEAD, CAM ACTUATION PER EN50041, FIGURES 8 AND 9							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX. OPERATE VEL $\frac{m/s}{in/s}$	MIN. OPERATE VEL $\frac{mm/s}{in/s}$	MAX. OPERATE FREQUENCY OPS/MIN
GL**01A GL**07A	SNAP - ACTION CONTACTS SINGLE POLE 	 12 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**03A GL**33A	SLOW ACTING BREAK BEFORE MAKE 	 32	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**04A GL**34A	SLOW ACTING MAKE BEFORE BREAK 	 20	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**05A GL**35A	SLOW ACTING 	 23-24	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**06A GL**36A	SLOW ACTING 	 21-22	$\frac{9.7}{2.2}$	$\frac{11.4}{2.6}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**20A GL**22A GL**24A GL**32A	SNAP ACTION CONTACTS DOUBLE POLE 	 12 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	$\frac{11.8}{2.7}$	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**21A GL**25A GL**28A GL**31A	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 	 8.5 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	N/A	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250
GL**26J GL**27J GL**29J GL**30J	CCW CW SNAP ACTION CONTACTS DOUBLE POLE CENTER NEUTRAL 	 8 DIFFERENTIAL TRAVEL	$\frac{9.7}{2.2}$	N/A	$\frac{.85}{33.5}$	$\frac{8.5}{.33}$	250

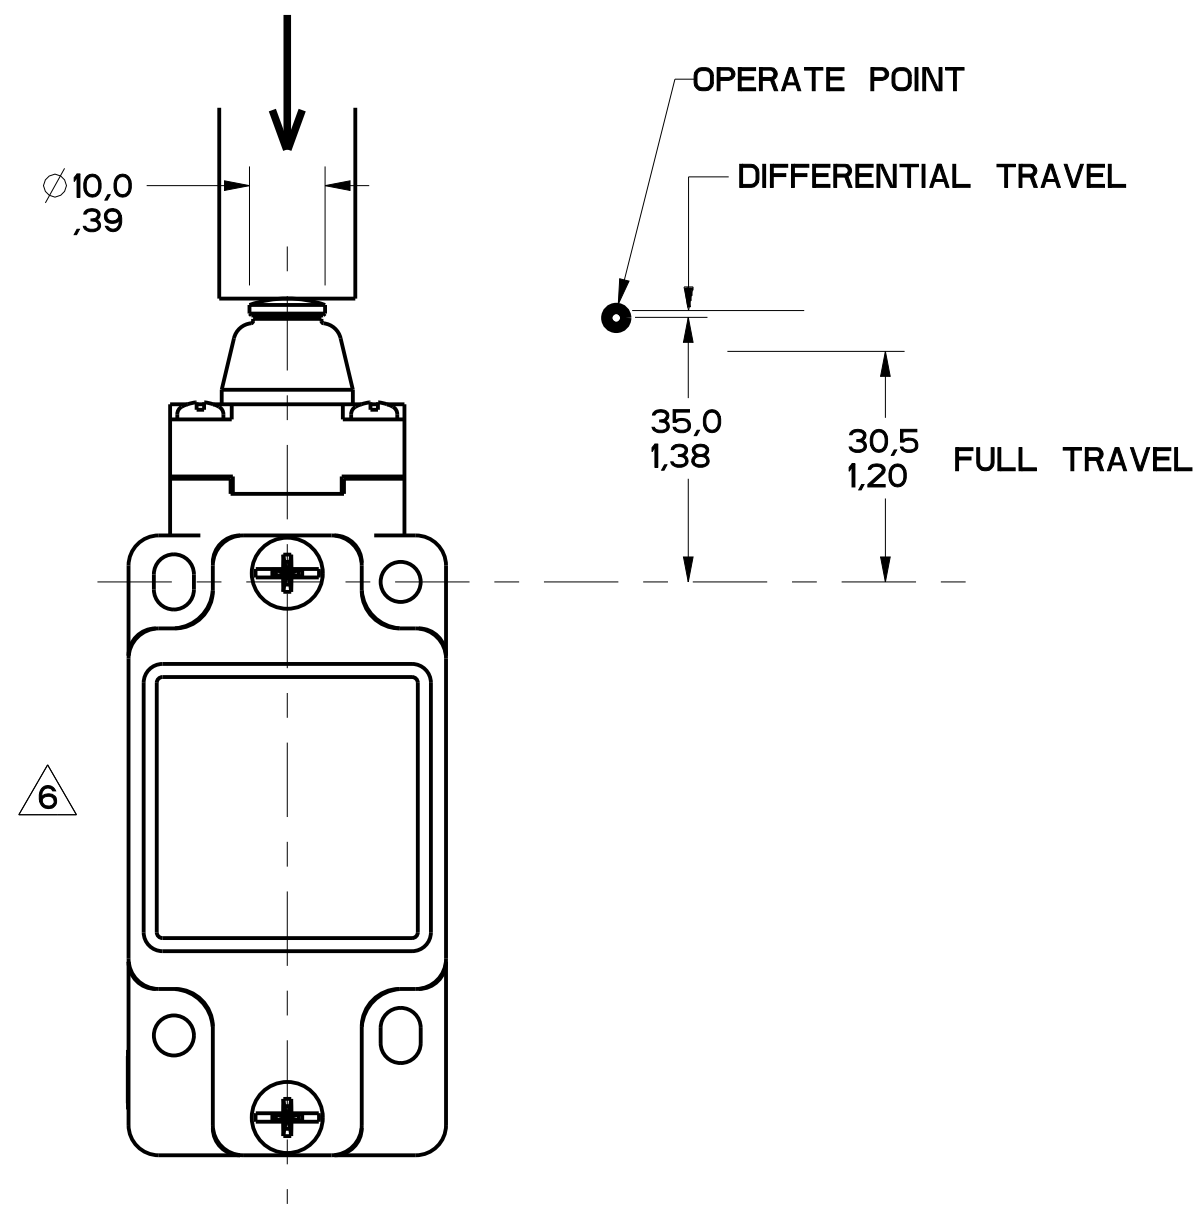


FIGURE 11

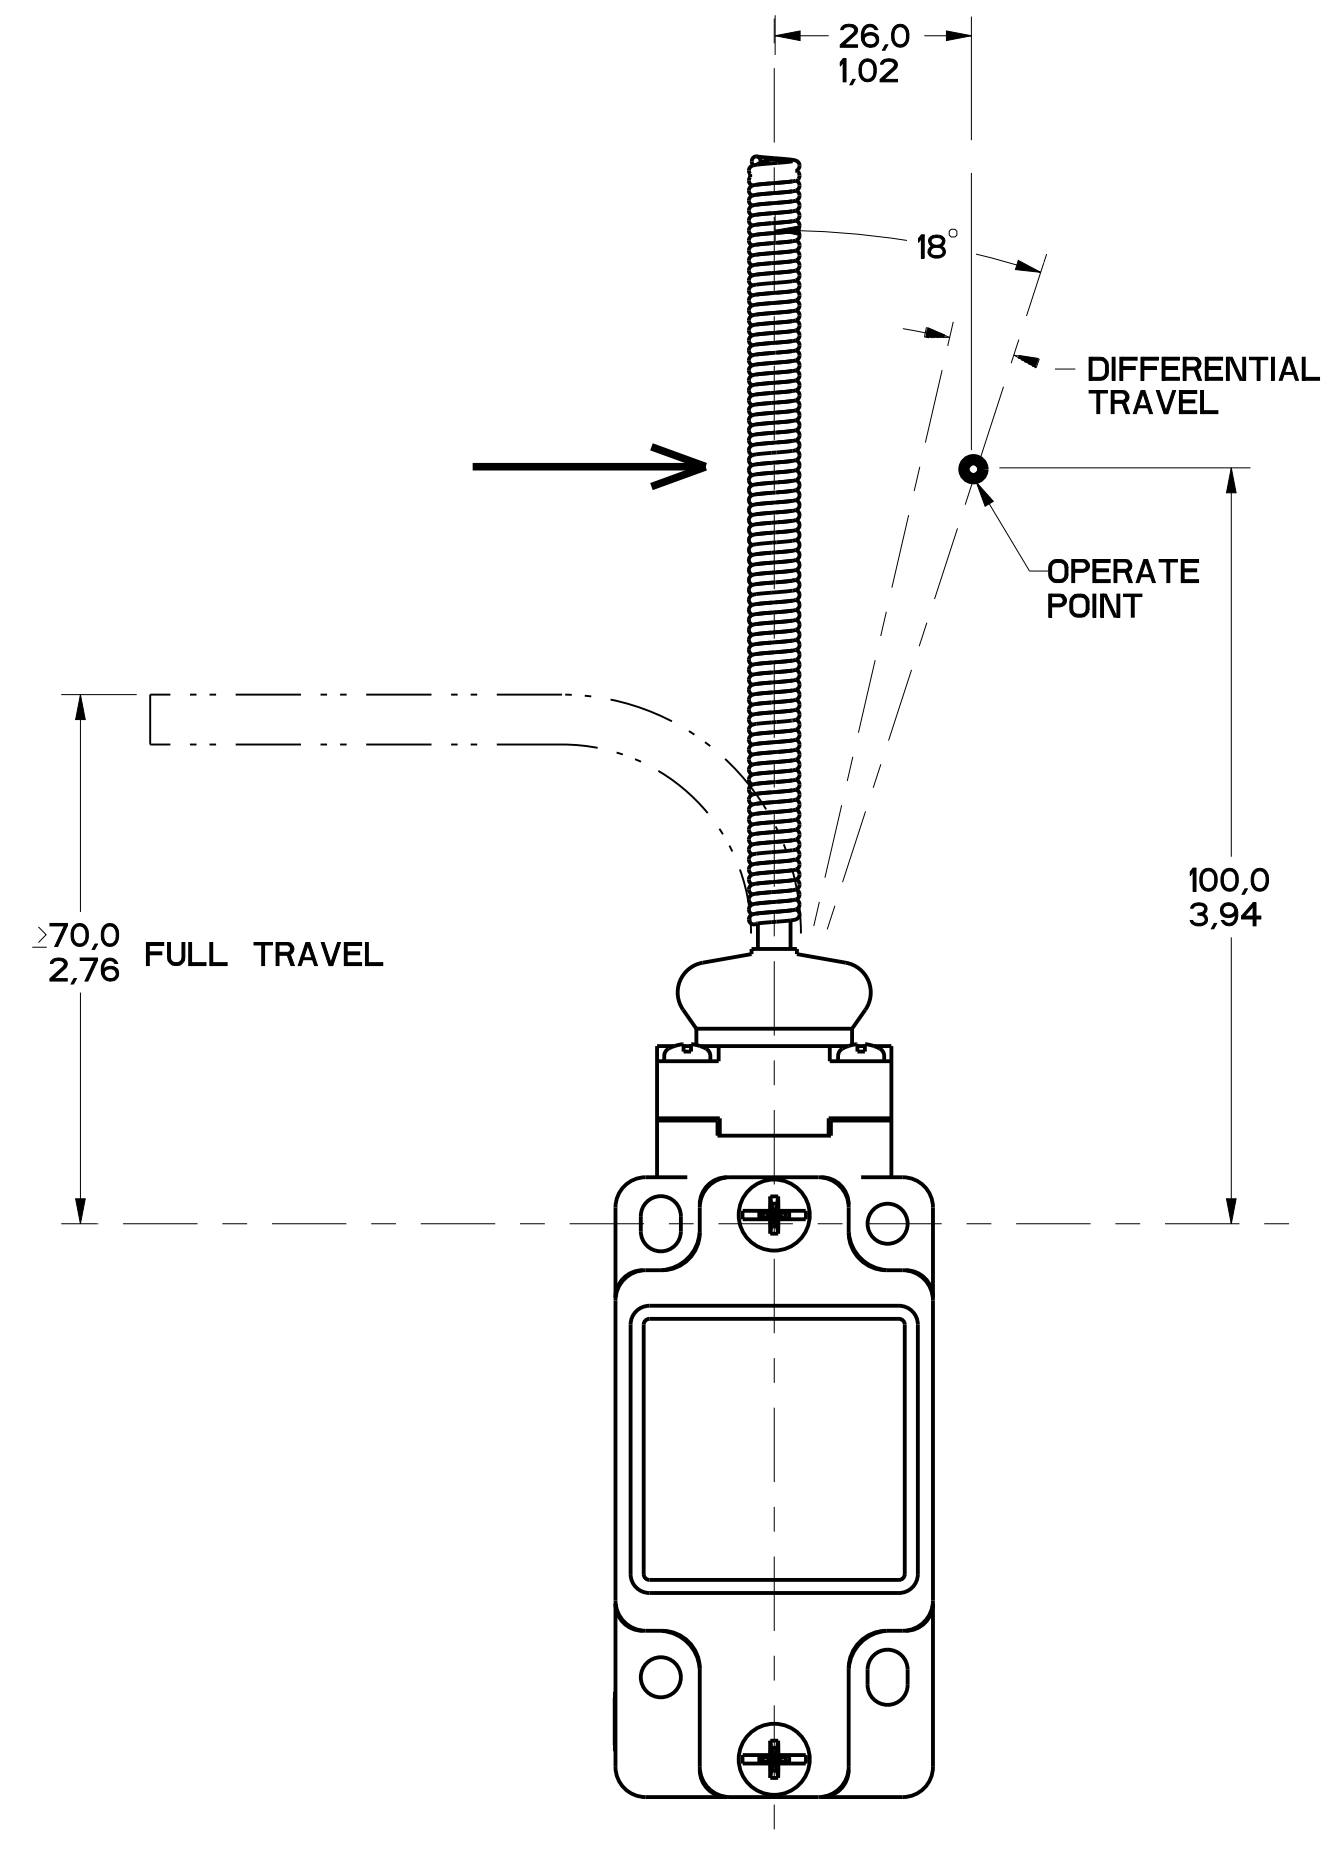


FIGURE 12

[illegible]

REVISIONS		GLH 26AUG93 CHECK CMH 05OCT10
F	0000401 GLH 2 JUN 03	
G	0002986 RS 20 JAN 04	
H	0033759 RKP 07AUG06	
J	0037216 BS 08FEB08	
K	0043629 SS 12SEP08	
L	0048605 YKS 09FEB09	
M	0070059 DN 05OCT10	
N	0094570 SBH 12OCT12	

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		<table><tr><td>QTY</td><td>TOL</td><td>QTY</td><td>TOL</td></tr><tr><td>mm / in</td><td>mm / in</td><td>mm / in</td><td>mm / in</td></tr><tr><td>NO PLACES</td><td>1.64</td><td>1.1</td><td>0.810</td></tr><tr><td>ONE PLACE</td><td>0.40-0.61</td><td>1.193</td><td>0.913-0.953</td></tr><tr><td>TWO PLACES</td><td>0.151-0.604</td><td>1.193</td><td>0.131-0.055</td></tr><tr><td>THREE PLACES</td><td>0.0</td><td></td><td></td></tr><tr><td>ANGLES</td><td>$\pm 2^\circ$</td><td></td><td></td></tr></table>		QTY	TOL	QTY	TOL	mm / in	mm / in	mm / in	mm / in	NO PLACES	1.64	1.1	0.810	ONE PLACE	0.40-0.61	1.193	0.913-0.953	TWO PLACES	0.151-0.604	1.193	0.131-0.055	THREE PLACES	0.0			ANGLES	$\pm 2^\circ$		
QTY	TOL	QTY	TOL																												
mm / in	mm / in	mm / in	mm / in																												
NO PLACES	1.64	1.1	0.810																												
ONE PLACE	0.40-0.61	1.193	0.913-0.953																												
TWO PLACES	0.151-0.604	1.193	0.131-0.055																												
THREE PLACES	0.0																														
ANGLES	$\pm 2^\circ$																														
FED. MFG. CODE 91929	CATALOG LISTING	<table><tr><td>SI METRIC</td><td>US CUSTOMARY</td></tr><tr><td>☒</td><td>☐</td></tr></table>		SI METRIC	US CUSTOMARY	☒	☐																								
SI METRIC	US CUSTOMARY																														
☒	☐																														
MICRO SWITCH a Honeywell Division	SWITCH, ENCLOSED	GL SERIES CHART 1																													
		WEIGHT																													

FIGURES 11, PIN PLUNGER HEAD, LINEAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{MM}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**01B GL**07B	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**03B GL**33B	SLOW ACTING BREAK BEFORE MAKE 	 34	$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**04B GL**34B	SLOW ACTING MAKE BEFORE BREAK 	 35	$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**05B GL**35B	SLOW ACTING 	 2X	$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**06B GL**36B	SLOW ACTING 	 2Y	$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**20B GL**22B GL**24B GL**32B	SNAP ACTION CONTACTS DOUBLE POLE 	 0.9 DIFFERENTIAL TRAVEL	$\frac{16}{3.6}$	$\frac{37}{8.2}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250
GL**21B GL**25B GL**28B GL**31B	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 	 .8 DIFFERENTIAL TRAVEL	$\frac{16}{3.6}$	N/A	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250

FIGURE 12, WOBBLE HEAD, ANGULAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING TORQUE $\frac{N-m}{LB/IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N-m}{LB/IN}$	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**01E GL**07E	SNAP - ACTION CONTACTS SINGLE POLE 	 8° DIFFERENTIAL TRAVEL	$\frac{0.2}{1.8}$	N/A	360	8	100
GL**03E GL**33E	SLOW ACTING BREAK BEFORE MAKE 	 0° 18° 25° 35°	$\frac{0.2}{1.8}$	N/A	360	8	100
GL**04E GL**34E	SLOW ACTING MAKE BEFORE BREAK 	 0° 18° 25° 35°	$\frac{0.2}{1.8}$	N/A	360	8	100
GL**05E GL**35E	SLOW ACTING 	 0° 25° 35°	$\frac{0.2}{1.8}$	N/A	360	8	100
GL**06E GL**36E	SLOW ACTING 	 0° 18° 35°	$\frac{0.2}{1.8}$	N/A	360	8	100
GL**20E GL**22E GL**24E GL**32E	SNAP ACTION CONTACTS DOUBLE POLE 	 8° DIFFERENTIAL TRAVEL	$\frac{0.2}{1.8}$	N/A	360	8	100

FIGURE 12, WOBBLE HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M}{S}$ $\frac{IN}{S}$	MIN OPERATE VEL $\frac{MM}{S}$ $\frac{IN}{S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**01E GL**07E	SNAP - ACTION CONTACTS SINGLE POLE 	 12 DIFFERENTIAL TRAVEL	$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**03E GL**33E	SLOW ACTING BREAK BEFORE MAKE 	 26.5 38.1	$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**04E GL**34E	SLOW ACTING MAKE BEFORE BREAK 	 26.5 38.1	$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**05E GL**35E	SLOW ACTING 	 38.1	$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**06E GL**36E	SLOW ACTING 	 26.5	$\frac{2.5}{0.6}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**20E GL**22E GL**24E GL**32E	SNAP ACTION CONTACTS DOUBLE POLE 	 26	$\frac{2.5}{0.6}$	N/A	360	8	100

THIRD ANGLE PROJECTION

SCALE -

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

NO PLACES	ONE PLACE	TWO PLACES	THREE PLACES	SI METRIC	US CUSTOMARY
				$\pm .04$	$\pm .0015$
				$\pm .01$	$\pm .0005$
				$\pm .001$	$\pm .0001$
				$\pm .0001$	$\pm .00001$

DESIGN UNITS ☒ SI METRIC ☐ US CUSTOMARY

WEIGHT

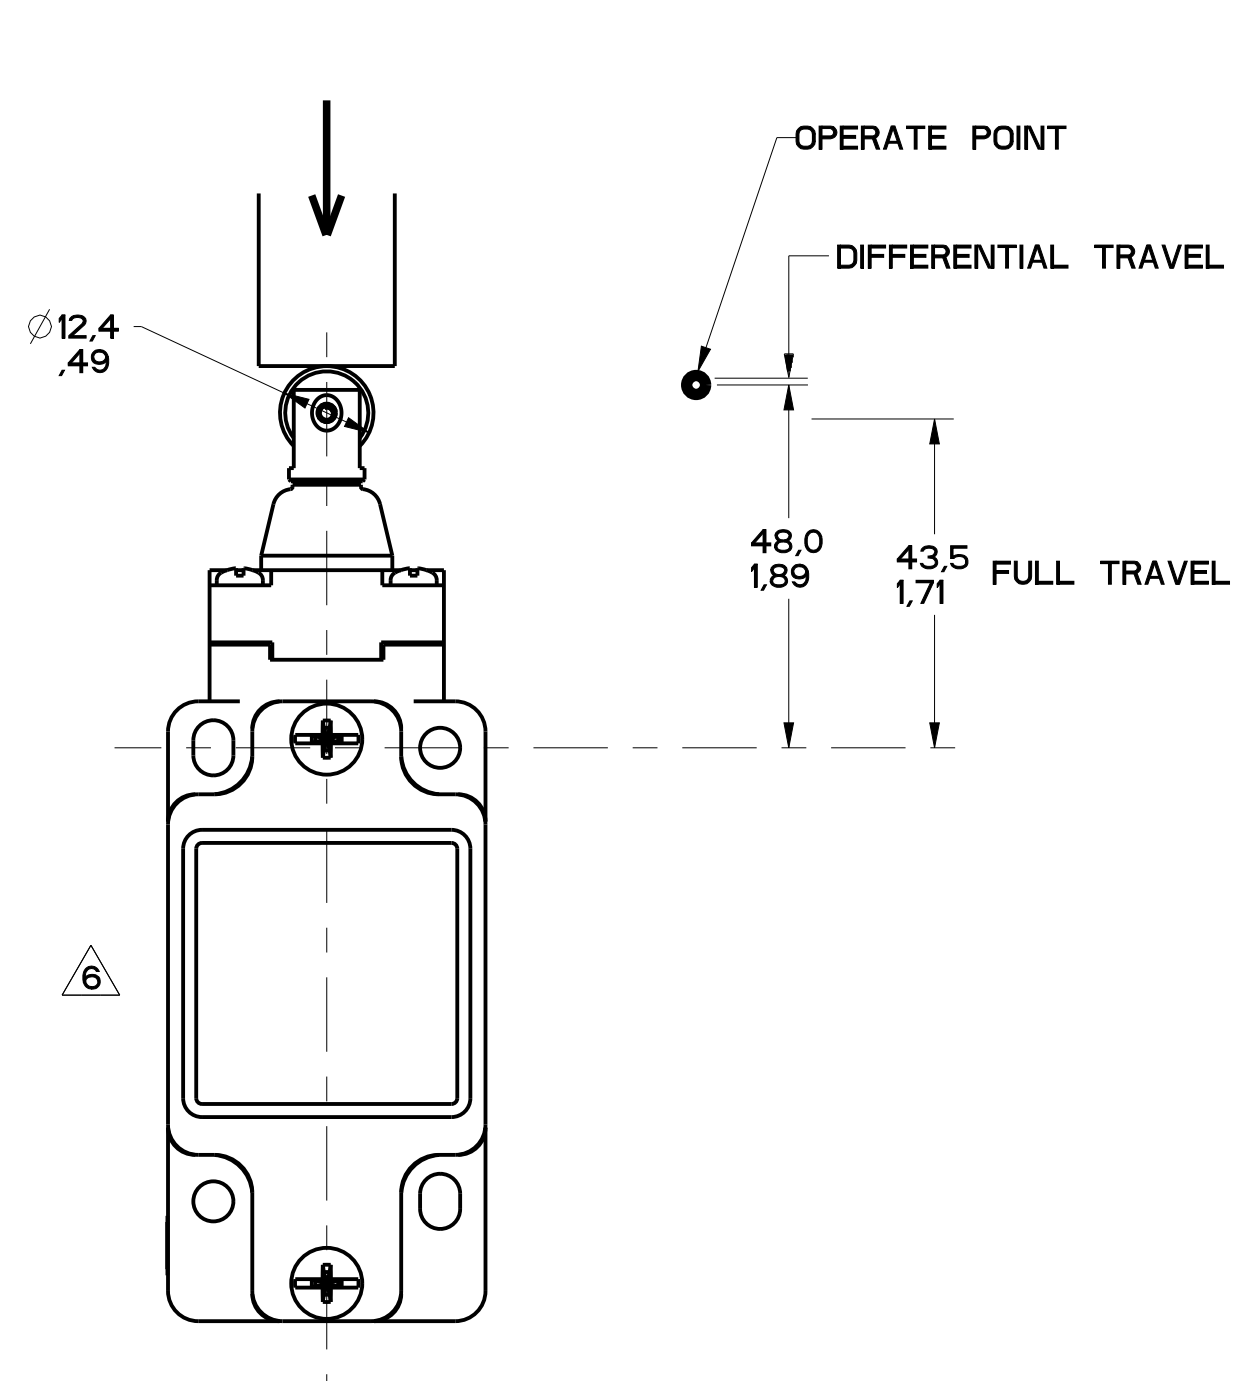


FIGURE 13A

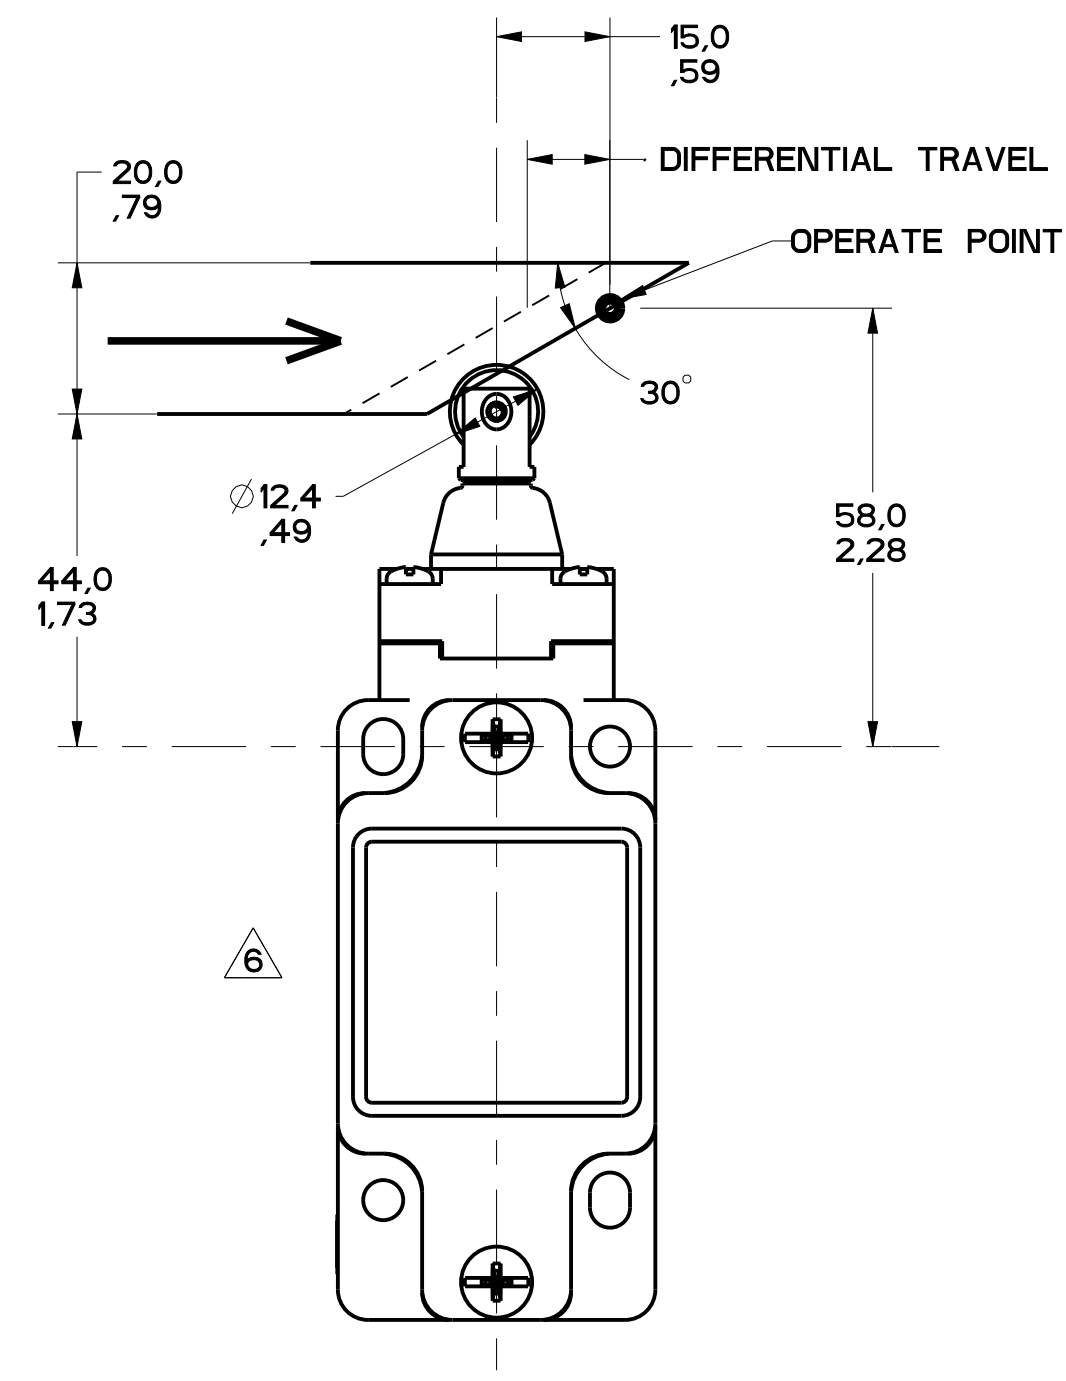


FIGURE 13B

MGL SERIES CHART 1			
DRAWING NUMBER	PAGE	8 OF 13	REPLACES
16			
ISSUE	CHECK	CMH	12OCT12
REVISIONS	DATE	BY	DESCRIPTION
A	0005047	CMH	05OCT10
B	01JUN03	CMH	05OCT10
C	0007986	CMH	05OCT10
D	0046864	CMH	05OCT10
E	0023759	CMH	05OCT10
F	0741606	CMH	05OCT10
G	0037216	CMH	05OCT10
H	0043629	CMH	05OCT10
I	0048605	CMH	05OCT10
J	0071809	CMH	05OCT10
K	0073059	CMH	05OCT10
L	0094510	CMH	05OCT10
M	0094510	CMH	05OCT10
N	0094510	CMH	05OCT10
O	0094510	CMH	05OCT10
P	0094510	CMH	05OCT10
Q	0094510	CMH	05OCT10
R	0094510	CMH	05OCT10
S	0094510	CMH	05OCT10
T	0094510	CMH	05OCT10
U	0094510	CMH	05OCT10
V	0094510	CMH	05OCT10
W	0094510	CMH	05OCT10
X	0094510	CMH	05OCT10
Y	0094510	CMH	05OCT10
Z	0094510	CMH	05OCT10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.			
FED. MFG. CODE 91929			
CATALOG LISTING			
MICRO SWITCH a Honeywell Division			
SWITCH, ENCLOSED			
GL SERIES CHART 1			
DESIGN UNITS			
WEIGHT			
THIRD ANGLE PROJECTION			
SCALE 1:1			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:			
NO PLACES	INCHES	TOL.	MM
ONE PLACE	INCHES	±.04	±.04
TWO PLACES	INCHES	±.01	±.01
THREE PLACES	INCHES	±.005	±.005
ANGLES	DEGREES	±.2	±.2
SI METRIC			
DESIGN UNITS	SI METRIC	US CUSTOMARY	
	☒	☐	

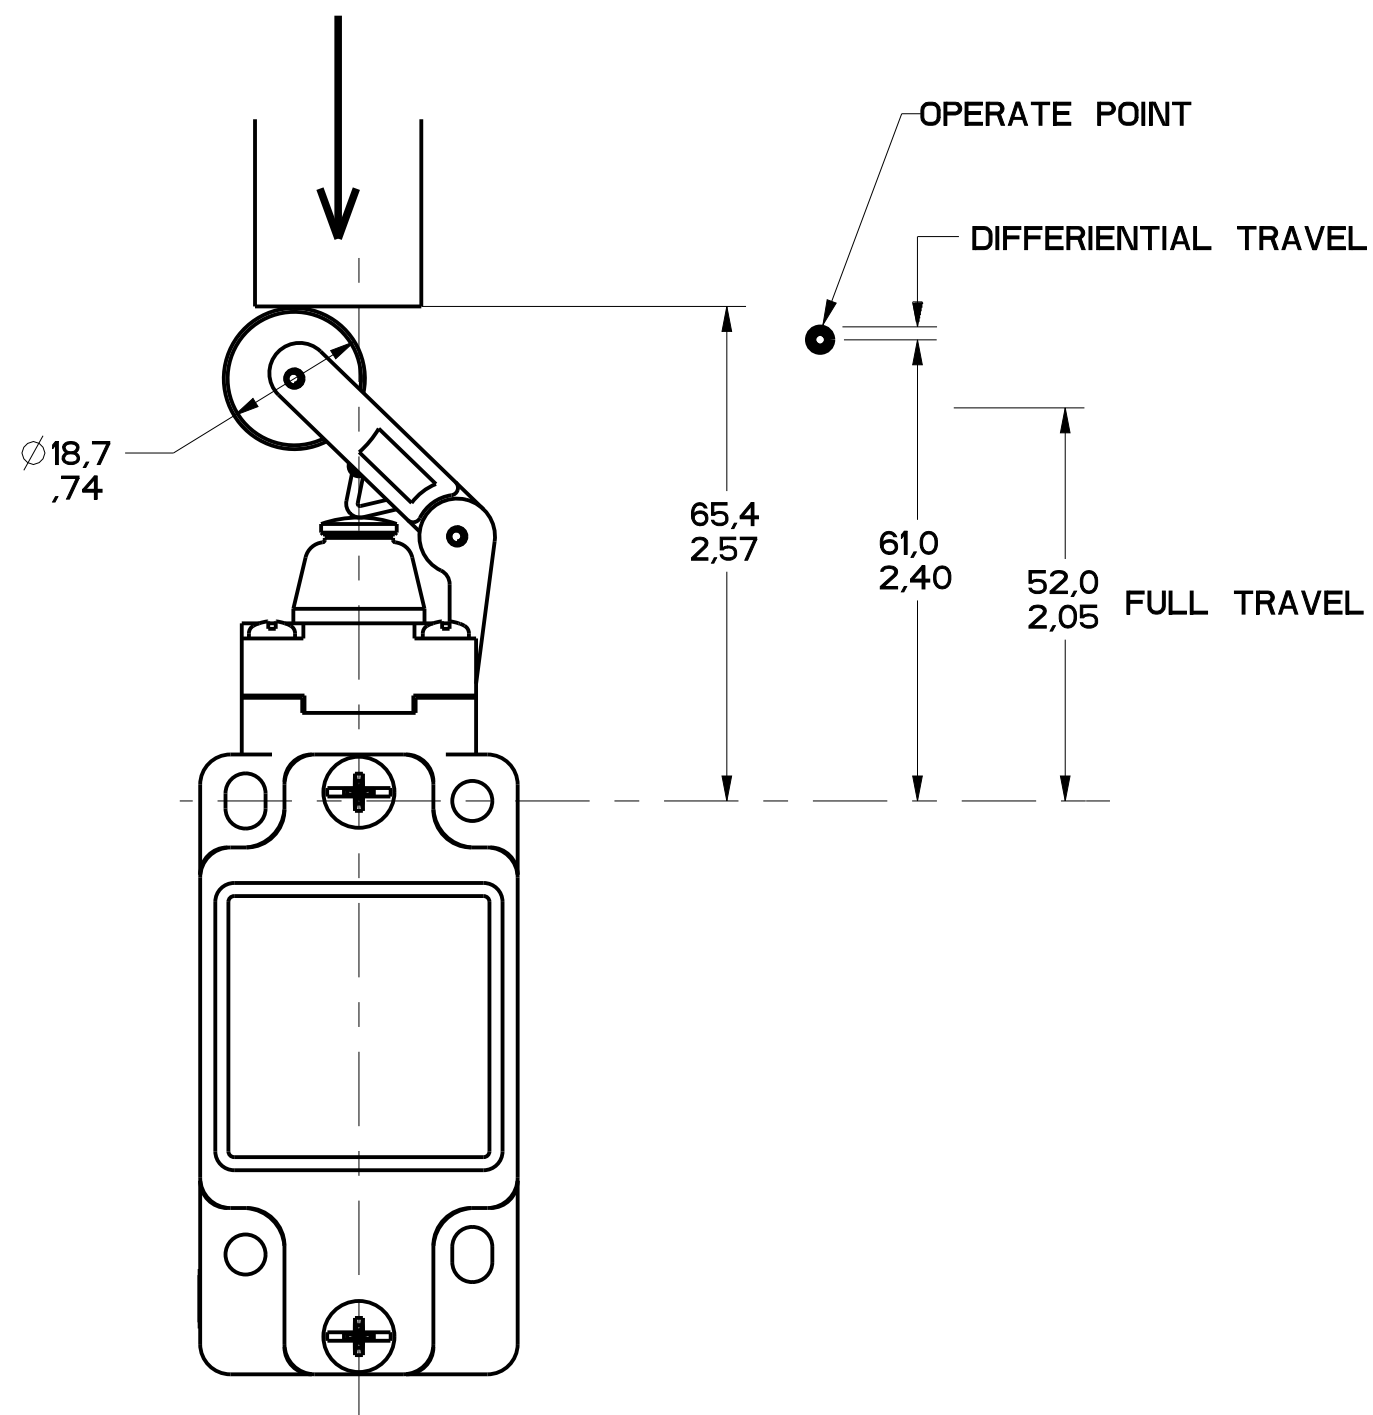


FIGURE 14A

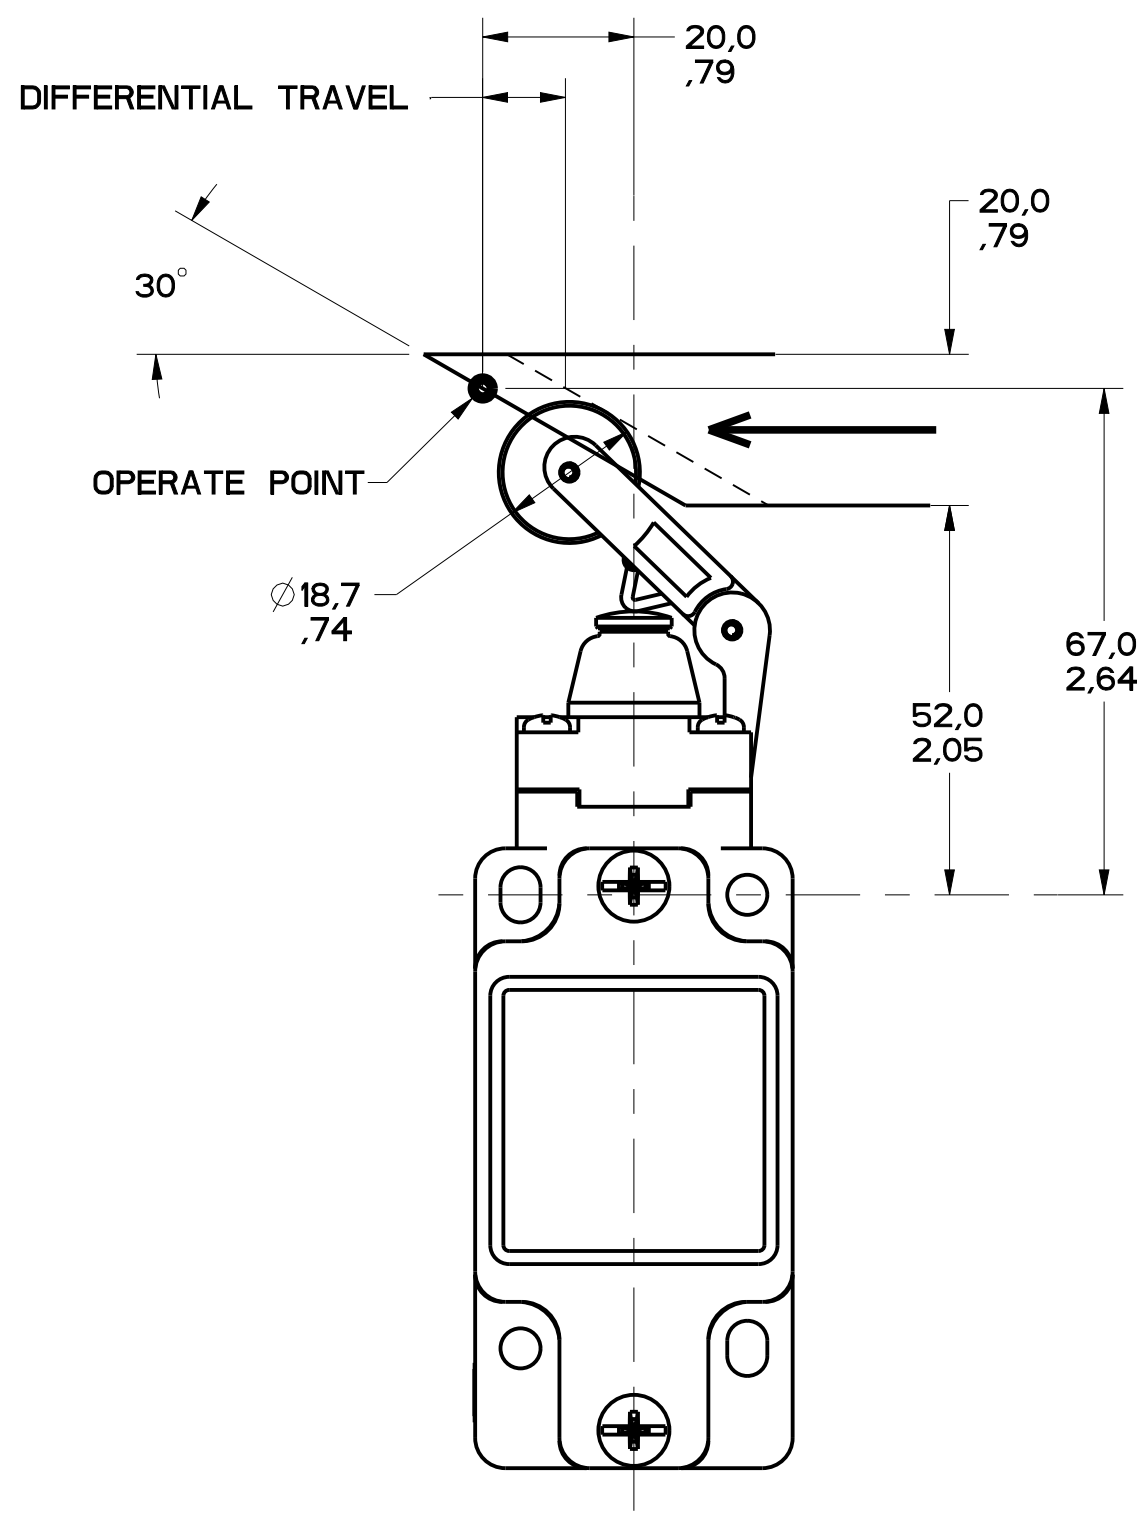


FIGURE 14B

DRAWING NUMBER				PAGE				RELEASE NO.				REPLACES			
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											
16				10 OF 13											

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S IN/S	MIN OPERATE VEL M/S IN/S	MAX OPERATE FREQUENCY OPS/MIN
GL**01D GL**07D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**03D GL**33D	SLOW ACTING BREAK BEFORE MAKE 		$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**04D GL**34D	SLOW ACTING MAKE BEFORE BREAK 		$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**05D GL**35D	SLOW ACTING 		$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**06D GL**36D	SLOW ACTING 		$\frac{9.5}{2.1}$	$\frac{12}{2.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**20D GL**22D GL**24D GL**32D	SNAP ACTION CONTACTS DOUBLE POLE 		$\frac{9.5}{2.1}$	$\frac{16.4}{3.7}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250
GL**21D GL**25D GL**28D GL**31D	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 		$\frac{9.5}{2.1}$	N/A	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5-1	MAXIMUM OPERATING FORCE N LB	MAXIMUM DISCONNECT FORCE N LB	MAX OPERATE VEL M/S IN/S	MIN OPERATE VEL M/S IN/S	MAX OPERATE FREQUENCY OPS/MIN
GL**01D GL**07D	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**03D GL**33D	SLOW ACTING BREAK BEFORE MAKE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**04D GL**34D	SLOW ACTING MAKE BEFORE BREAK 		$\frac{5.5}{1.2}$	$\frac{9.6}{2.2}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**05D GL**35D	SLOW ACTING 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**06D GL**36D	SLOW ACTING 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**20D GL**22D GL**24D GL**32D	SNAP ACTION CONTACTS DOUBLE POLE 		$\frac{5.5}{1.2}$	$\frac{7.0}{1.6}$	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250
GL**21D GL**25D GL**28D GL**31D	STEP 1 STEP 2 SNAP ACTION CONTACTS DOUBLE POLE SEQUENTIAL 		$\frac{5.5}{1.2}$	N/A	$\frac{0.29}{11.4}$	$\frac{2.9}{.11}$	250

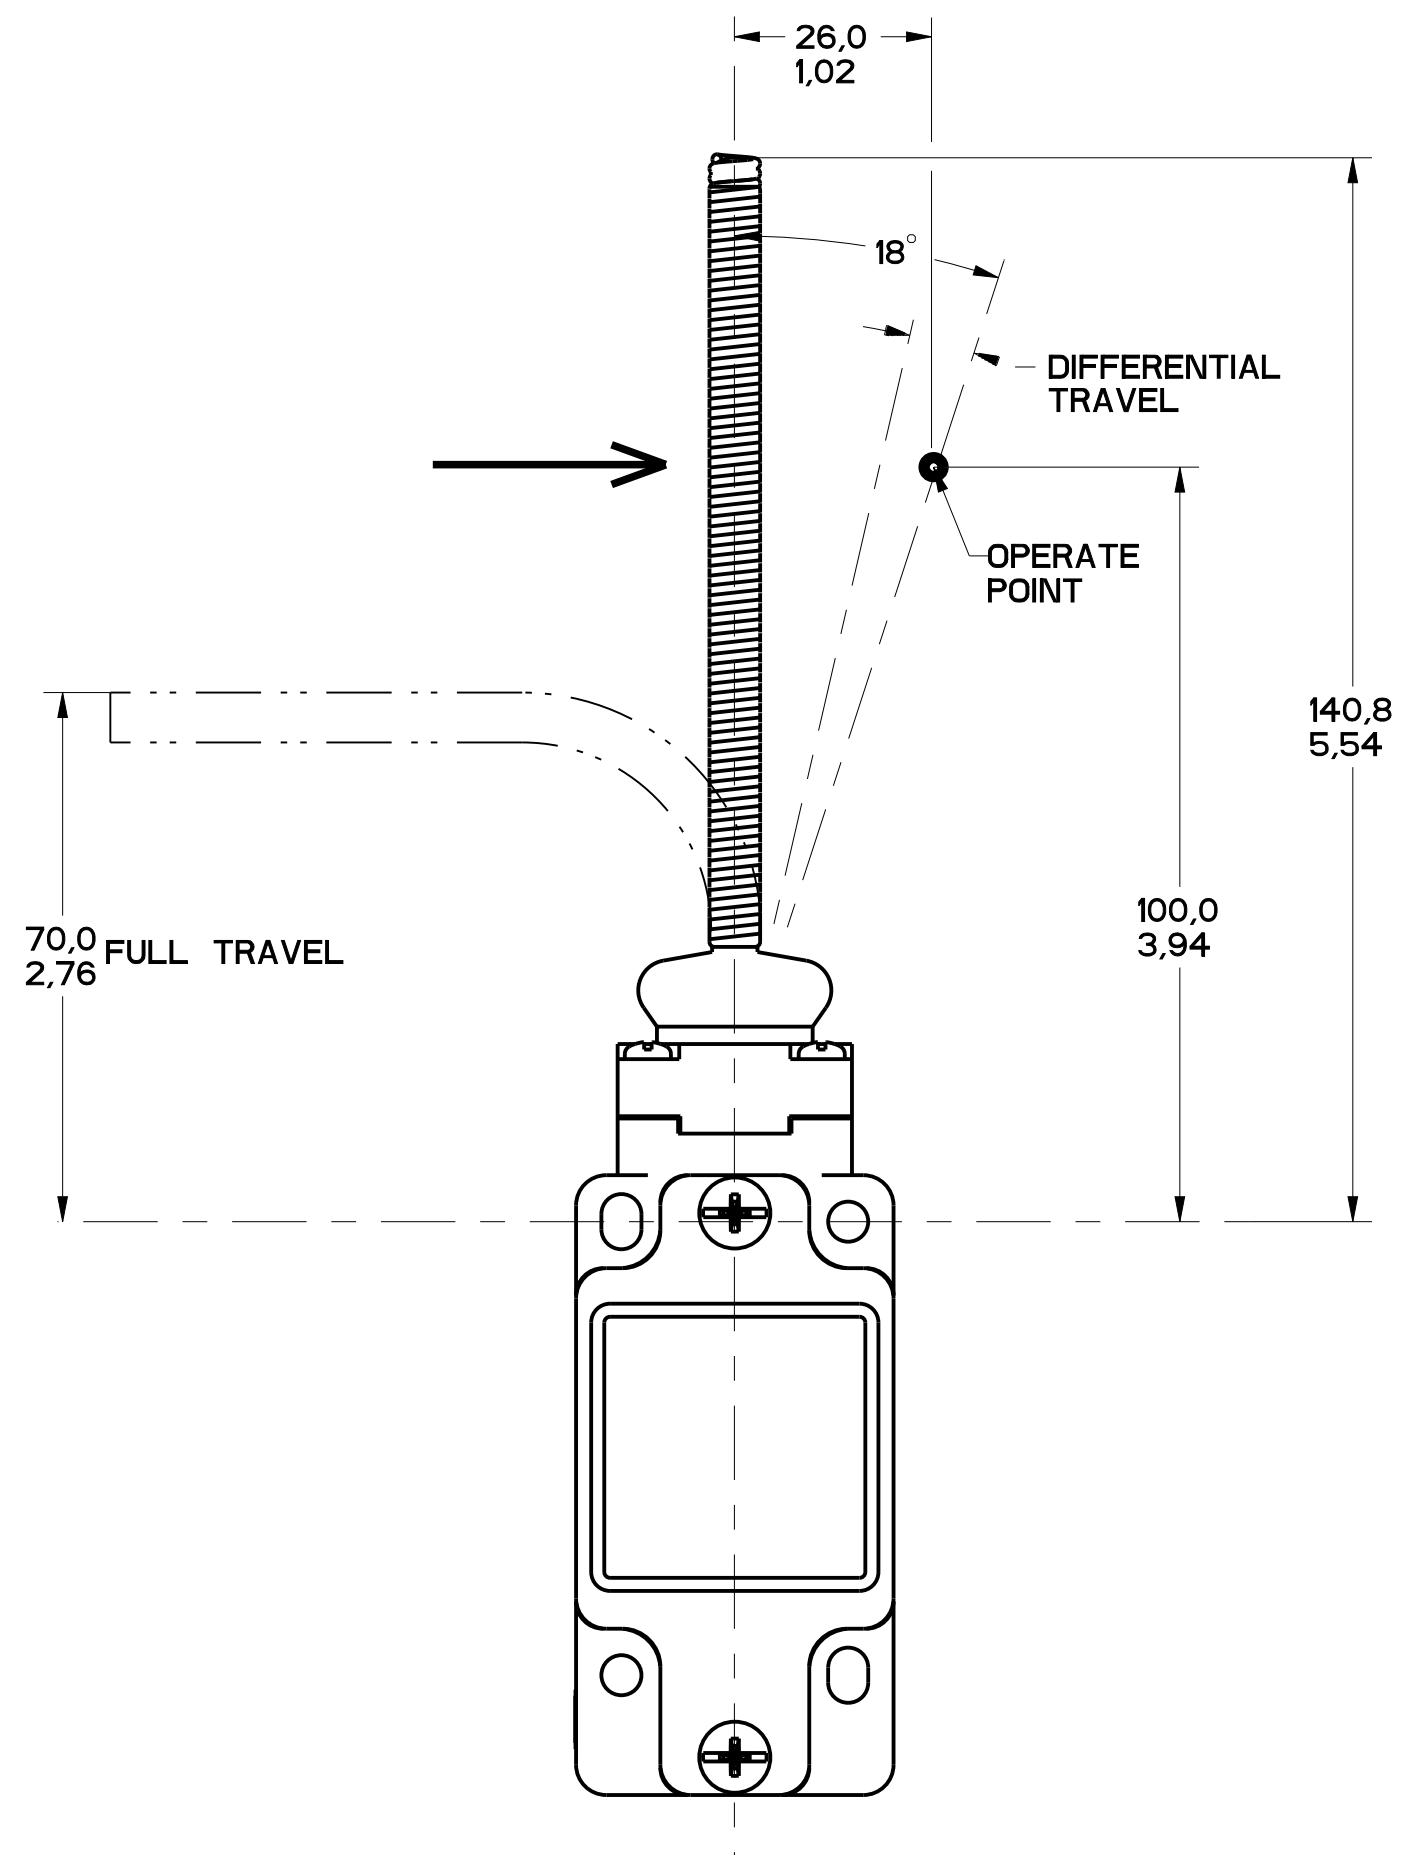


FIGURE 15

[illegible]

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.					
FED. MFG. CODE 91929		CATALOG LISTING			
MICRO SWITCH a Honeywell Division		SWITCH, ENCLOSED			
		GL SERIES CHART 1			
		NO PLACES 3 ONE PLACE 3 X X TWO PLACES 3 XX THREE PLACES ANGLES $\pm .0005$ $\pm .001$ $\pm .0015$ $\pm .002$		DIM INCHES TOL MILLI METERS DIM INCHES TOL MILLI METERS SI METRIC ☒ US CUSTOMARY ☐ DESIGN UNITS WEIGHT	

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL	MAXIMUM OPERATING TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAXIMUM DISCONNECT TORQUE $\frac{N \cdot m}{LB \cdot IN}$	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**01K GL**07K	SNAP - ACTION CONTACTS SINGLE POLE 	 18° 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8	100
GL**03K GL**33K	SLOW ACTING BREAK BEFORE MAKE 	 18° 25	$\frac{0.1}{.9}$	N/A	360	8	100
GL**04K GL**34K	SLOW ACTING MAKE BEFORE BREAK 	 25° 18°	$\frac{0.1}{.9}$	N/A	360	8	100
GL**05K GL**35K	SLOW ACTING 	 25°	$\frac{0.1}{.9}$	N/A	360	8	100
GL**06K GL**36K	SLOW ACTING 	 18°	$\frac{0.1}{.9}$	N/A	360	8	100
GL**20K GL**22K GL**24K GL**32K	SNAP ACTION CONTACTS DOUBLE POLE 	 18° 8° DIFFERENTIAL TRAVEL	$\frac{0.1}{.9}$	N/A	360	8	100

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm							
CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ - CONTACT CLOSED, □ - CONTACT OPEN, ▨ - CONTACT CLOSED DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE $\frac{N}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{N}{LB}$	MAX OPERATE VEL $\frac{M/S}{IN/S}$	MIN OPERATE VEL $\frac{mm/S}{IN/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**01K GL**07K	SNAP - ACTION CONTACTS SINGLE POLE 	 26 12 DIFFERENTIAL TRAVEL	$\frac{1.3}{.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**03K GL**33K	SLOW ACTING BREAK BEFORE MAKE 	 26.5 38.1	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**04K GL**34K	SLOW ACTING MAKE BEFORE BREAK 	 26.5 38.1	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**05K GL**35K	SLOW ACTING 	 38.1	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**06K GL**36K	SLOW ACTING 	 26.5	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100
GL**20K GL**22K GL**24K GL**32K	SNAP ACTION CONTACTS DOUBLE POLE 	 26 12 DIFFERENTIAL TRAVEL	$\frac{1.3}{0.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100