










**Connection terminal, 160A, 1p, flat/round**


**Part no.** K95/1N  
**Catalog No.** 010773

**EL-Nummer (Norway)** 4132411

**Delivery program**

Product range			General switchboard accessories
Product function			Accessories panel building
Accessories			Terminations
Accessories			Terminals, 160 – 1000 A
Rated insulation voltage	U <sub>i</sub>	V AC	1000
Description			Including labels for terminal marking U, V, W - X, Y, Z - L1, L2, L3 - T1, T2, T3 - PE, N, PEN,  Relationship of rated operational current → terminal capacity to IEC/EN 60439, VDE 0660 Part 500 or EN 50021 Outer terminal for round or sectoral conductor, other side for Cu strip
Rated operational current	I <sub>e</sub>	A	160
Pole			1
<b>Terminal capacity</b>			
Cu/Al cable			Cu  Round stranded  Sectoral stranded  Round solid  Sectoral solid Al  Round solid  Sectoral solid
			1 x 16 - 95
Al cable			Al  Sectoral solid
			1 x 35 - 70
Copper band		mm	3 x 9 x 0.8 - 6 x 9 x 0.8
			# copper strip
conductor			18 x 4
			 Cu bar
<p><b>Notes</b> Conversion kits for strip terminal in cable connection available separately                  Terminal covers available separately</p>			

## Dimensions

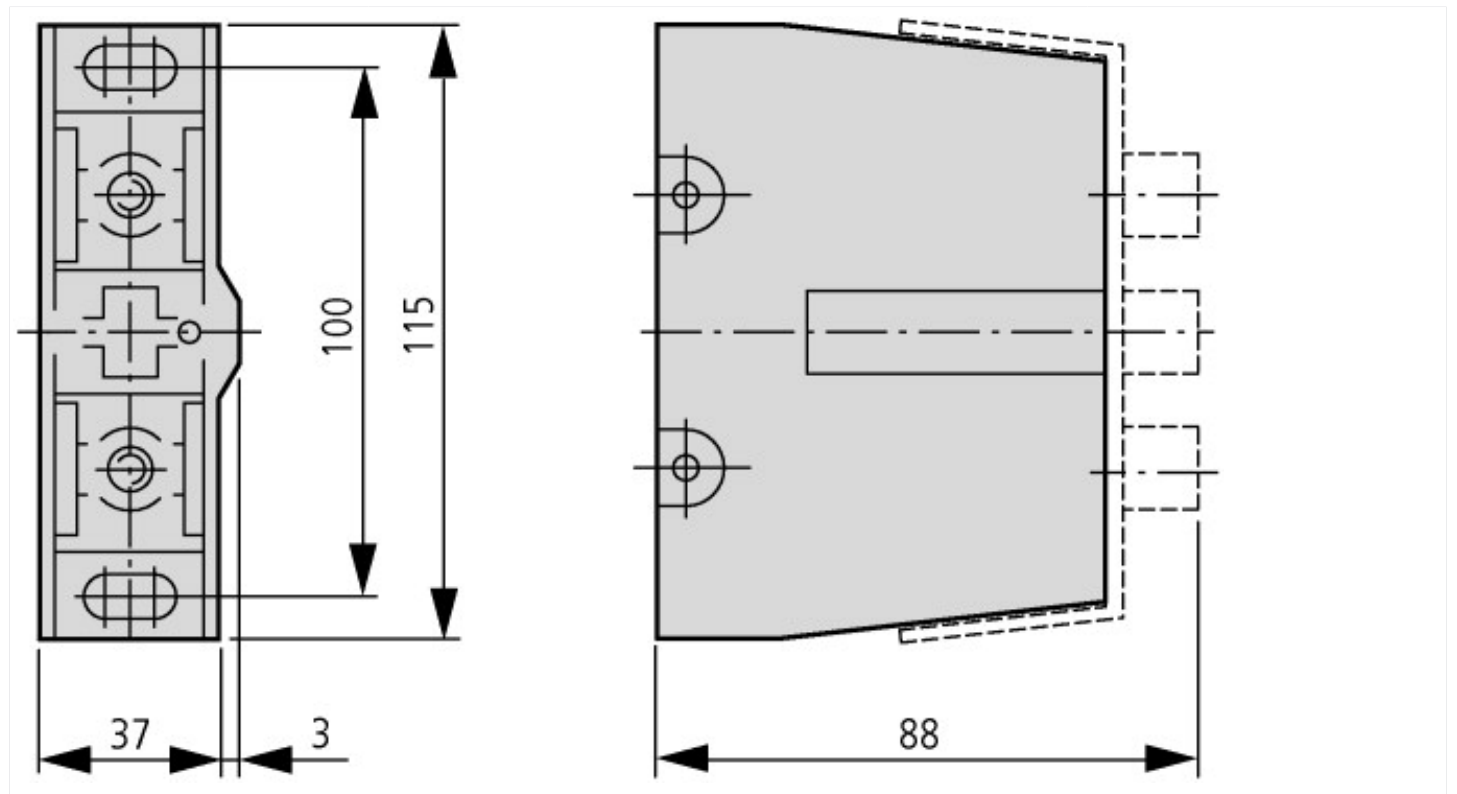

## Additional product information (links)

AWA3400-0656 Connection terminals K95/...

AWA3400-0656 Connection terminals K95/...

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/06561089.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/06561089.pdf)