




**Joystick 4 positions, momentary**

**Part no.** M22-WJ4  
**Catalog No.** 279417  
**Eaton Catalog No.** M22-WJ4Q  
**EL-Nummer** 4355453  
**(Norway)**



**Delivery program**

|   |   |  |  |
|---|---|--|--|
| Product range   |   |  | RMQ-Titan  |
| Basic function  |   |  | Joystick   |
| Single unit/Complete unit   |   |  | Single unit  |
| <b>Function:</b>  |   |  |  |
| Function  |   |  |  |
| Description   |   |  | with one operating point per operating direction<br>With plastic shaft             |
|   |   |  | 4 positions  |
| Degree of Protection  |   |  | IP66   |
| Front ring  |   |  | Bezel: titanium  |
| Connection to SmartWire-DT  |   |  | yes<br>with SWD-RMQ connections  |
| <b>Actuator travel and actuation force as per DIN EN 60947-5-1, K.5.4.1</b> |   |  |  |
| Minimum force for positive opening  | N |  | 0  |
| Front dimensions  |   |  | - N/A -  |
| Function  |   |  | momentary<br>in every position   |

**Technical data**

**General**

|                             |              |               |  |
|-----------------------------|--------------|---------------|--|
| Standards                   |              |               | IEC/EN 60947<br>VDE 0660   |
| Lifespan, mechanical        | Operations   | $\times 10^6$ | > 0.1  |
| Operating frequency         | Operations/h |               | $\leq 2000$  |
| Actuating force             |              | n             | $\leq 5$   |
| Climatic proofing           |              |               | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Degree of Protection        |              |               | IP66   |
| Ambient temperature         |              |               |  |
| Open                        |              | °C            | -25 - +70  |
| Mounting position           |              |               | As required  |
| Mechanical shock resistance |              | g             | 30<br>Shock duration 11 ms<br>Sinusoidal<br>according to IEC 60068-2-27        |

**Design verification as per IEC/EN 61439**

|  |            |   |   |
|--|------------|---|---|
| Technical data for design verification                   |            |   |   |
| Rated operational current for specified heat dissipation | $I_n$      | A | 0 |
| Heat dissipation per pole, current-dependent             | $P_{vid}$  | W | 0 |
| Equipment heat dissipation, current-dependent            | $P_{vid}$  | W | 0 |
| Static heat dissipation, non-current-dependent           | $P_{vs}$   | W | 0 |
| Heat dissipation capacity                                | $P_{diss}$ | W | 0 |

|  |    |  |
|--|----|--|
| Operating ambient temperature min.   | °C | -25  |
| Operating ambient temperature max.   | °C | 70   |
| IEC/EN 61439 design verification   |    |  |
| 10.2 Strength of materials and parts   |    |  |
| 10.2.2 Corrosion resistance  |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |    | Please enquire   |
| 10.2.5 Lifting   |    | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.2.6 Mechanical impact   |    | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.2.7 Inscriptions  |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |    | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.4 Clearances and creepage distances   |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |    | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.6 Incorporation of switching devices and components   |    | Does not apply, since the entire switchgear needs to be evaluated.                                       |
| 10.7 Internal electrical circuits and connections  |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |    |  |
| 10.9.2 Power-frequency electric strength   |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |    | Not applicable.  |
| 10.11 Short-circuit rating   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.           |
| 10.12 Electromagnetic compatibility  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.           |
| 10.13 Mechanical function  |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


## Technical data ETIM 6.0

|   |    |         |
|---|----|---------|
| Low-voltage industrial components (EG000017) / Control switch, Joystick (EC000632)  |    |         |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Control switch, joystick (ecl@ss8.1-27-37-14-04 [AKF061010]) |    |         |
| Rated operation current I <sub>e</sub> at AC-21, 400 V  | A  | 0       |
| Centre mounting, hole diameter  | mm | 22.5    |
| Joy stick length  | mm | 75      |
| Number of actuation directions  |    | 4       |
| Number of switch levels   |    | 1       |
| Number of normally open contacts per actuation direction  |    | 0       |
| Number of normally closed contacts per actuation direction  |    | 0       |
| Number of make-and-break contacts per direction   |    | 0       |
| With retraction in 0-position   |    | Yes     |
| Locking in 0-position   |    | No      |
| Coder   |    | No      |
| Analogue output signal configurable   |    | No      |
| Degree of protection (IP)   |    | IP66    |
| With front ring   |    | Yes     |
| Material front ring   |    | Plastic |
| Colour front ring   |    | Chrome  |

## Approvals

|                         |  |  |
|-------------------------|--|--|
| Product Standards       |  | IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking |
| UL File No.             |  | E29184   |
| UL Category Control No. |  | NKCR   |
| CSA File No.            |  | 012528   |

## Dimensions

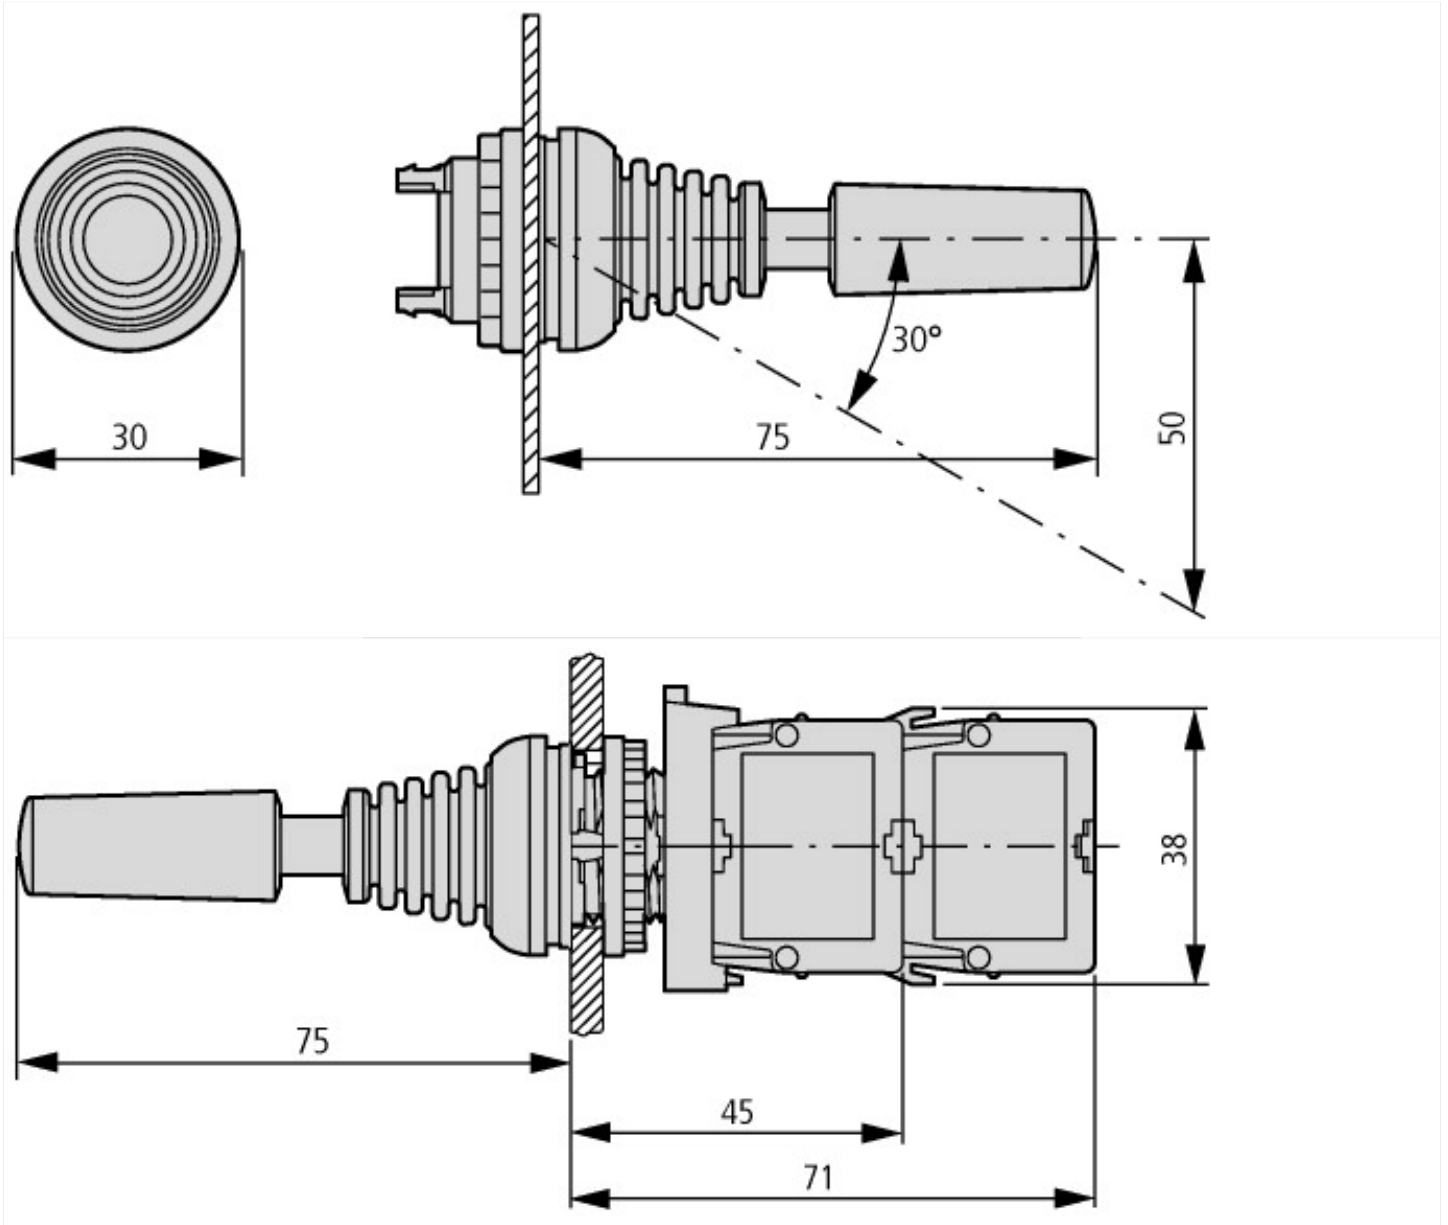

## Additional product information (links)

**IL04716002Z (AWA1160-1745) RMQ-Titan System**

IL04716002Z (AWA1160-1745) RMQ-Titan System

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL04716002Z2018\\_05.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716002Z2018_05.pdf)