

3-ph.comm.link PKZ2..f.2aux.cont.



Powering Business Worldwide™

Part no.  
Article no.

B3.1/2-PKZ2  
063969

## Delivery programme

Product range		Accessories: PKZ2 System - PRODUCT DISCONTINUATION IN 2012
Accessories		Three-phase commoning link
For use with		For wiring of 2 PKZ2s, space is provided for either 1 auxiliary contact or 1 voltage release
<b>Notes</b>		
Can be extended to several PKZ2s by rotated mounting, protected against accidental contact		
U <sub>e</sub> = 690 V, I <sub>u</sub> = 120 A, short-circuit proof		

## Approvals

Product Standards	UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.	E36332
UL CCN	NLRV
CSA File No.	12528
CSA Class No.	3211-05
NA Certification	UL listed, CSA certified
Specially designed for NA	No


## Incoming terminal and three-phase current

Rated impulse withstand voltage	U <sub>imp</sub>	V AC	6000
Overvoltage category/pollution degree			III/3
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current	I <sub>u</sub>	A	120

## Technical data ETIM 4.0

Insulated			YES
Number of phases			3
Cross-section		mm <sup>2</sup>	0
Rated uninterrupted current I <sub>u</sub>		A	40
Length		mm	140
Rated conditional short-circuit current I <sub>q</sub>		kA	0
Rated impulse voltage		kV	0
Design of electrical connection			Pen
Rated short-time withstand current I <sub>cw</sub>		kA	0
Suitable for devices with auxiliary contacts			No
Suitable for devices with neutral pole			No
Suitable for number of devices			2
Max. rated operating voltage U <sub>e</sub>		V	690
Unit width		mm	80.5

## Dimensions

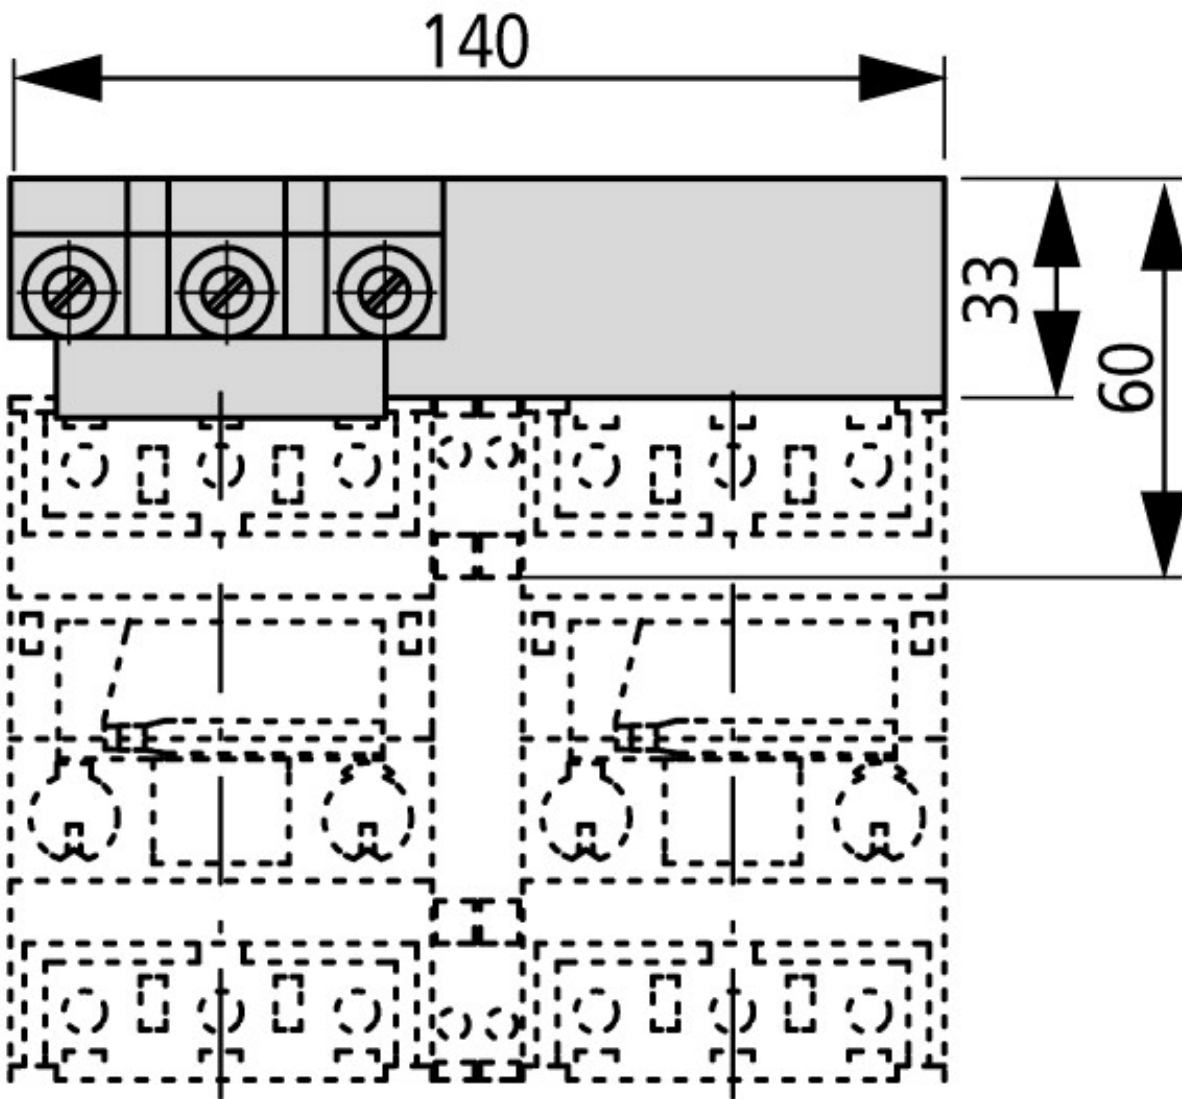

Three-phase commoning link

#### Additional product information (links)

Motor starters and "Special Purpose Ratings" for the North American market

[http://www.moeller.net/binary/ver\\_techpapers/ver953en.pdf](http://www.moeller.net/binary/ver_techpapers/ver953en.pdf)

Busbar Component Adapters for modern Industrial control panels

[http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)